


Push button 10A 250V~ with built-in light and screw terminal connection system Simon 73

REF. 73160-39

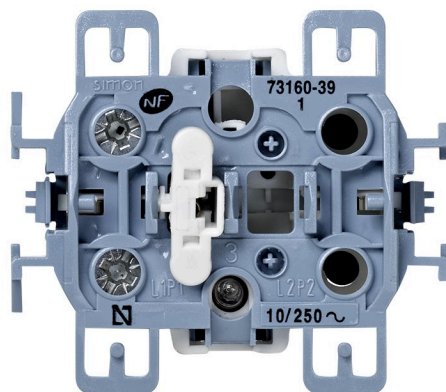

BASIC INFORMATION

DESCRIPTION

With the push-button switch of the collection Simon 73 Loft, you will obtain an elegant and sophisticated finishes such as a complement perfect for a design suitable for installation in surface-mounted or trunking, with the minimum thickness. This push-button switch, with built-in indicator light with a consumption of 0.55 milliampere, and can be implemented the signaling function by means of a signaling support and cover with viewer. It is also compatible with power supplies with a voltage of 250 Volts and intensity of 10 Amps with amplitude modulated (AM). Designed with screw terminal connection, its components are made of metal materials with halogen-free thermoplastic isolated, for greater protection in case of fire. It can reach a temperature range of 5 to 40 ° C and maximum temperatures ranging from -25 and 50 °C. The push-button switch Simon 73 Loft, has a rocker operation and supports a cable section of 1.5 to 2.5 mm and stripping of the 13 mm Functionality, innovation and designs that adapt to all types of spaces in the collection Simon 73 Loft.

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 73 Loft and Simon 73 frames

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Possibility of implementing indicator function using a signal light support and rocker with viewer.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CURRENT (A)

10 A

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

0.55 mA

IP RATING

IP20

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

MONOBLOCK

No

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

13

INSTALLATION TYPE

Suitable for surface mounting

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

No aplica

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053255339

UNITARY PACKAGING GROSS WEIGHT

0.027

PACKAGING LENGTH

220

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.027

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

1201200

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053028742

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.276

UNITARY PACKAGING VOLUME

1201200

PACKAGING HEIGHT

52

PACKAGING NET WEIGHT

0.27

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH


105

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 73


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
73101-39




Pulsador / Push button switch
73150-39



Interrupor bipolar / Double pole switch
73131-39

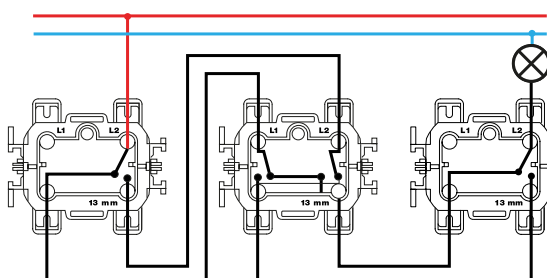


Conmutador cruce / Intermediate switch
73251-39



Conmutador / 2-way switch
73201-39

Mecanismos con luminoso / Switches with light



Pulsador / Push button switch
73160-39