# Neutral push button 10AX 250V~ with fast terminal connection system white Simon 27 Play

REF. **27659-65**



## BASIC INFORMATION

### DESCRIPTION

This push-button switch 10A 250V~ neutral is finished in white and offers a quick terminal connection system, which reduces the times considerably. The article is included in the Simon 27 Play series and measures 45x45 mm This manufactured with metal components with halogen-free thermoplastic insulation and thermoset trim. These materials are characterized by its resistance to extreme temperatures and also against scratches, providing maximum protection for the user. The push-button switch is suitable for surface or flush mounting installation and is in compliance with the current regulation. If you wish, you can replace the finish of the supplied rocker, having 7 additional to choose. The reference is compatible with the frames of the series Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralizations and Simon 44 Aqua, so that you have several options available to combine it in your preferences.

### FINISH

White

### MATERIAL

Thermoplastic

### COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

### PACKAGING CONTENTS

Mechanism with rocker

### ETIM CLASS

EC000029

### REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 7 additional finishes available.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

### NUMBER OF POSSIBLE ELEMENTS

1 element

### INDICATOR FUNCTION

No

### IP RATING

IP20

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### TYPE OF MECHANISM

Pivoting

### NOMINAL VOLTAGE (V~)

250 V~

### OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

### VERSION

Single

## INSTALLATION AND MAINTENANCE

### CABLE STRIPPING NECESSARY (MM)
11

### CLAW
Simon 27

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

### INSTALLATION DIRECTION
Horizontal, Vertical

### INSTALLATION TYPE
Suitable for surface and flush mounting

### TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

## REGULATIONS

### REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

# LOGISTICS INFORMATION

UNITARY EAN CODE
8421053252628

UNITARY PACKAGING HEIGHT
45.3

UNITARY PACKAGING WIDTH
36.7

UNITARY PACKAGING LENGTH
45.9

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.076

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.03

PRODUCT NET WEIGHT
0.03

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053044711

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
48.5

PACKAGING WIDTH
85.7

PACKAGING LENGTH
224.5

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
0.933


PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.25


PACKAGING NET WEIGHT
0.3

PACKAGING WEIGHT UNIT
KGM

## VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO

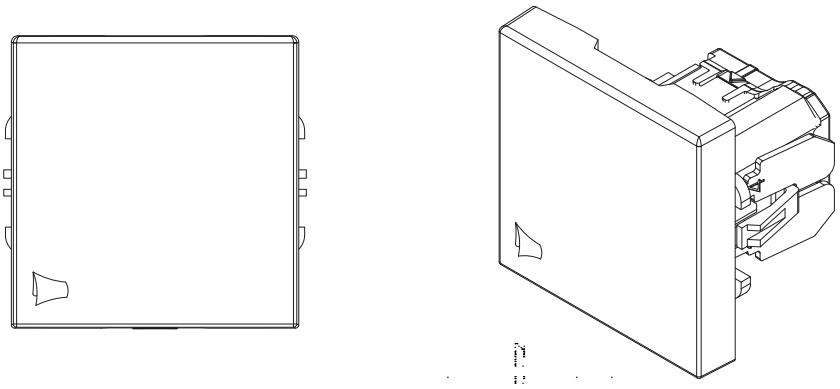

## DIAGRAMA DE MONTAJE

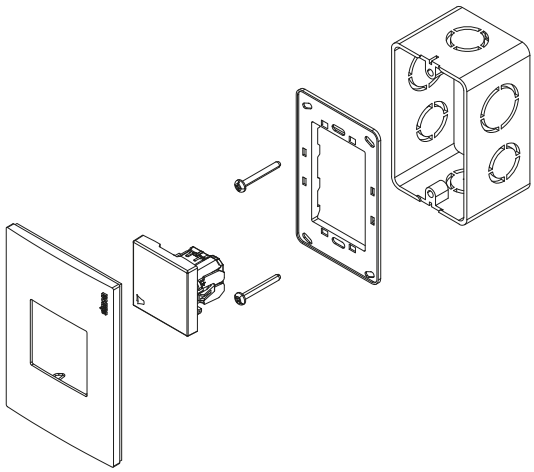

*Placa y chasis NO incluidos

## DIAGRAMA DE CONEXIÓN

