Service cover for 12 elements for installation in concrete or raised floor grey Simon 500 Cima

REF. **52054106-035**



BASIC INFORMATION

DESCRIPTION

It is a service cover, 12 elements designed for installation in concrete floor, although it is also suitable for raised floor, measuring 225 x 310 x 66 mm, the article is grey and has been manufactured in strict compliance with legislation. It contains metal parts in halogen-free, self-extinguishing thermoplastic. This material is 100% safe in case of fire, as it prevents the flames spreading and guarantees low toxicity in the event of smoke. It is possible to combine the product with a flush-mount trim cover for a better result. It is essential to properly maintenance this type of mechanism and, therefore, the manufacturer recommends cleaning the piece with a soft, dry cloth to avoid damaging it.. The cover belongs to the Simon 500 Cima series, a collection that vela by the optimum workplace solutions in all kinds of environments.

FINISH

Grey

PACKAGING CONTENTS

Service cover and installation manual

ETIM CLASS

EC001903

MATERIAL

Plastic

REMARKS

Once the product has been installed, you have the option to combine it with the flush-mount trim cover (ref.52053106-035) in cases where you do not install the same floor covering.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

PROTECTION AGAINST DIRECT ACCESS OF CONTACTS
No

PROTECTION AGAINST ENTRY OF DUST AND SMALL OBJECTS
Yes, thanks to the inclusion of protective foam

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
12 modules

RAL
7011

RECESS DIMENSION (MM)
210 x 300 mm

VERSION
12 elements

INSTALLATION AND MAINTENANCE

CLAW RANGE OF OPERATION (MM)
Between 14 and 54 mm

NUMBER OF COVER OPENING POSITIONS
2

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using fastening claws on the concrete floor tray or the raised floor tile (provided in the service cover)

CAN BE INSTALLED IN TRAY
Plástica y metálica

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised floor and concrete floor

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101667

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

1.69

PRODUCT NET WEIGHT

1.69

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053101667

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

79

PACKAGING WIDTH

236

PACKAGING LENGTH

342

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

6.376

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

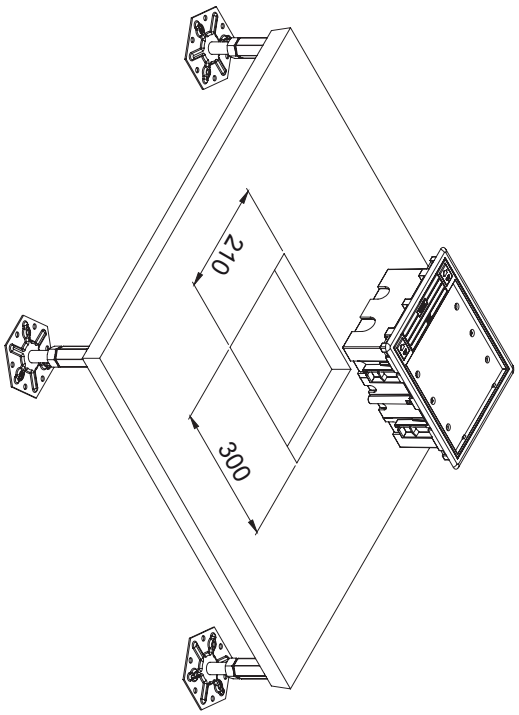
0

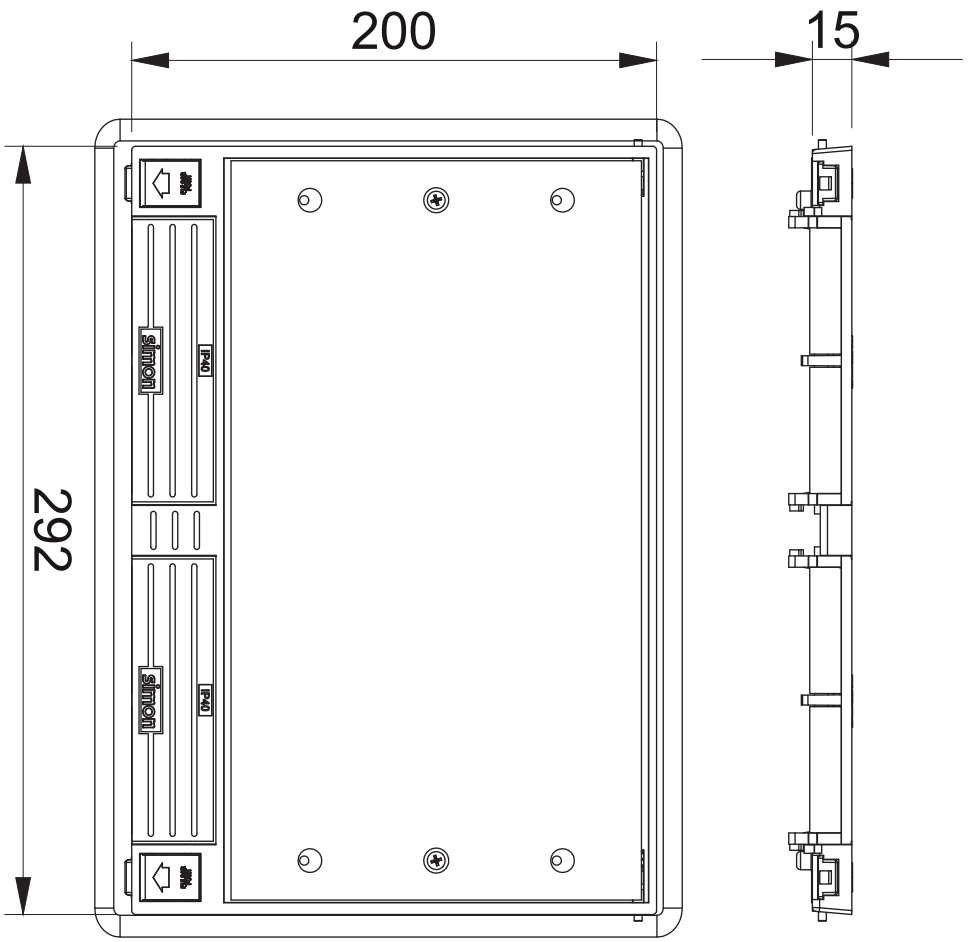
PACKAGING NET WEIGHT

1.69

PACKAGING WEIGHT UNIT

KGM


210
300


200
15
292
simon
IP40
simon
IP40