


Luminaire A10 BT Mesh 10,7W 3000K with detector 8m HF+LUX anthracite IP54 IK10

REF. 89391602-103

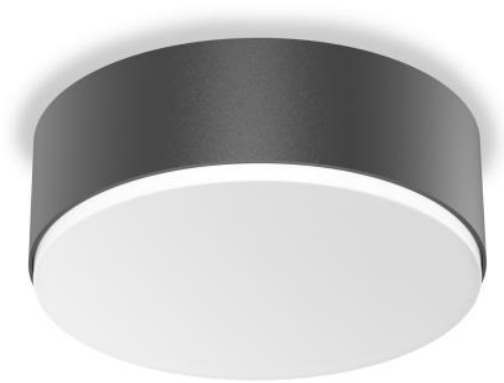

BASIC INFORMATION

DESCRIPTION

Light fixture with integrated HF detector and Bluetooth connectivity. The power is 10.7 W, the luminous flux is 1095 lm, and the color temperature is 3000 K.

The maximum installation height is 4m and the installation is surface-mounted. The detection range is 8m and the detection angle is 360°.

The brightness regulation range is 2 - 2000 lux and the timing range is 10 s - 60 min.

The configuration of the light fixture is done through a Bluetooth application. Possibility of interconnection between light fixtures via Bluetooth mesh.

The power supply voltage is 220 - 240 VAC. The operating temperature is: -20 - 40 °C.

Protection grade IP 54 and IK 10, and dimensions: Ø 193 x 69 mm.

5-year warranty.

For more product information, visit STEINEL website by clicking [here](#)

FINISH

Anthracite

ETIM CLASS

EC002892

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

IP RATING

IP54

IK CLASSIFICATION

10

POWER SUPPLY (V~)

220/240 V~

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053383407

UNITARY PACKAGING GROSS WEIGHT

0.99

PACKAGING LENGTH

85

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.99

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

2325323

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053383407

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.99

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

310

PACKAGING NET WEIGHT

0.99

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

310

PACKAGING WEIGHT UNIT

KGM