

FLUSH-MOUNTED DOWNLIGHT 719 20W 4000K

REF. 71922030-984



BASIC INFORMATION

FINISH

White

PACKAGING

Box

APPLICATION

General lighting

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

POWER SUPPLY (V~)

220/240 V~

COLOR TYPE

WW

IP RATING

IP20

CONTROL

On/Off

OPTICS


Microprismatic

PHOTOMETRY ASSETS – CONICAL

0.5	1.15 1.21	E(0°) 3900 E(C90) 549 E(C0) 505
1.0	2.31 2.42	E(0°) 975 E(C90) 137 E(C0) 126
1.5	3.46 3.63	E(0°) 433 E(C90) 61 E(C0) 56
2.0	4.62 4.84	E(0°) 244 E(C90) 34 E(C0) 32
2.5	5.77 6.04	E(0°) 156 E(C90) 22 E(C0) 20
3.0	6.93 7.25	E(0°) 108 E(C90) 15 E(C0) 14

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]
 — C0 - C180 (Semiángulo de dispersión: 100.8°)
 — C90 - C270 (Semiángulo de dispersión: 98.2°)

PHOTOMETRY ASSETS – POLAR

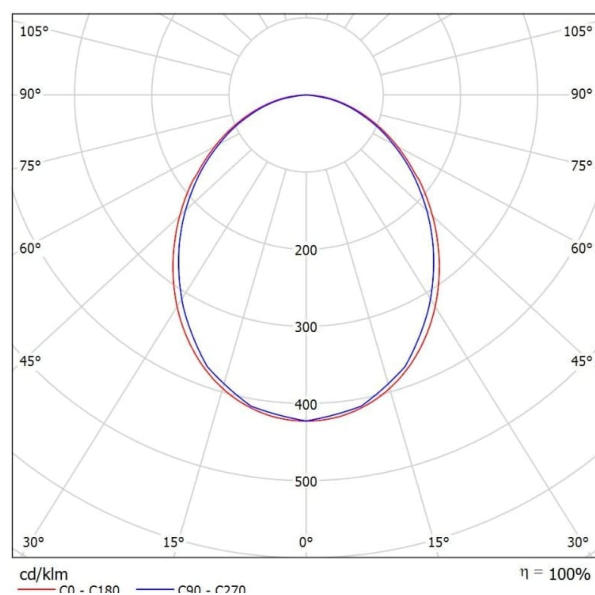

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION HEIGHT

35

REGULATIONS

WARRANTY

3 years

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2009/125/EC ErP (Reg. UE 2019/2020) | Dir. 2009/125/EC ErP (Reg. UE 2019/2015) | Dir. 2011/65/UE RoHS + post. mod. | EN 60598-2-2:2012 | EN IEC 55015:2019 + A11:2020 | EN 62493:2015 | EN 61547:2009 | EN 62717:2017 + A2:2019 | EN IEC 61000-3-2:2019 + A1:2021*1 | EN IEC 63000:2018 | EN 61000-3-3:2013 + A1:2019 + A2:2021

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053327012

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053327012

PACKAGING VOLUME

2025000

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

40

PACKAGING GROSS WEIGHT

0.3

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

225

PACKAGING NET WEIGHT

0.21

UNITARY PACKAGING GROSS
WEIGHT

0.3

PACKAGING LENGTH

225

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.21