


Voice and data flat plate with dust cover for 1 element and 1 RJ45 connector category 6 FTP aluminium Simon K45

REF. K96F/8

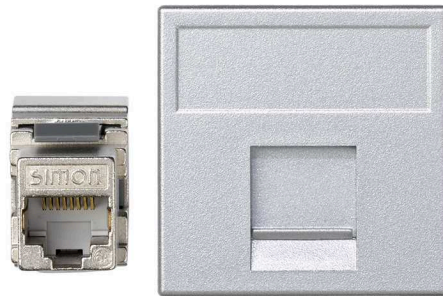

BASIC INFORMATION

DESCRIPTION

Element of the plate and voice model K96F / 8 It is part of the range of components, for professional SimonK45 Connectors and plates for voice and data connections, easy combination with other elements Technical knowledge of the series. It is a plate of voice and Data flat plate with dust cover with 1 element for 1 RJ45 connector of Category 6 FTP and with snap-fit Keystone I, II, ATT ® / Avaya ® with insertion tool. Presents colour and finishes in tonality graphite, made with components Components with self-extinguishing and halogen-free thermoplastic insulation. That guarantees no flame propagation in case of fire and the low toxicity. In case of combination with plate of voice and Fatos vertical enclosures you need the element The 90° positioner (ref. K66) to a correct orientation. It has a Measures 45x45mm and a depth of 42,9mm, being very easy to To adapt to different systems and assemblies professionals, in different environments. Work professionals and home.

FINISH

Aluminium

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

PACKAGING CONTENTS

Flat voice and data plate with dust cover, category 6 UTP RJ45 connector and installation manual

ETIM CLASS

EC000018

REMARKS

When combining the voice and data plate in vertical housings (mini columns, columns, Teleblock, channels, mechanism holders, etc.) you must use the 90° positioner (ref. K66) to guide the plate into a vertical position.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

22-24 AWG wiring

AVAILABLE IN

Plate with 1 and 2 RJ45 connectors

RJ45 CONNECTION

With insertion tool

CONNECTOR CHARACTERISTICS

Category 6 FTP

RJ45 CONNECTORS

Included in voice and data plate

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

DUST PROTECTION

Yes

DUST SHUTTER

Yes

FORMAT

RJ45

IP RATING

IP20

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

NUMBER OF MODULES

Half

PLATE TYPE

Flat

RJ45 ADAPTOR MODULE

Supplied with the voice and data plate

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

VERSION

Single

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

INSTALLATION TYPE

Suitable for surface and flush mounting

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.038

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

2115750

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436046207

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

10

PACKAGING GROSS WEIGHT

0.65

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING HEIGHT

65

PACKAGING NET WEIGHT

0.38

UNITARY PACKAGING GROSS WEIGHT

0.038

PACKAGING WIDTH

155

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

210