Monoblock push-button switch IP55 10A 250V~ with fast terminal connection system grey Simon 44 Aqua

REF. **4490150-035**



BASIC INFORMATION

DESCRIPTION

With measures of 84x75 mm, the individual monoblock push-button switch, IP55 of the series Simon 44 Aqua has a tilting quick terminal connection system and is available in grey colour, in addition to being compatible with elements up to 250 V of voltage and 10 A of intensity, it is made of metal components with halogen-free insulation and trim in thermoplastic of the best quality, ensuring maximum security in those environments exposed to the environmental conditions. Thanks to the IP55 protection against the accumulation of dirt, protect you any mechanism that is displayed at the air. And is that the series Simon 44 Aqua is the ideal solution for use in terraces, gardens and swimming pools or sports facilities, among others, a collection designed to adapt to the inclement weather.

FINISH

Grey

COMPATIBILITY

Simon 27 mechanisms

ETIM CLASS

EC000029

MATERIAL

Thermoplastic

PACKAGING CONTENTS

Mechanism, socket and frame with rocker

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

NUMBER OF POSSIBLE ELEMENTS
1 element

IK CLASSIFICATION
07

INDICATOR FUNCTION
No

IP RATING
IP55

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

MONOBLOCK
Yes

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RAL
7035

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

INSTALLATION DIRECTION
Vertical

INSTALLATION TYPE
Suitable for surface mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018*1 | IEC 60884-1 Ed. 3.2*2 | UNE 20315-1-1:2017*2 | UNE 20315-1-2:2017*2 | EN IEC 60670-1:2021 + A11:2021*3 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.145

PRODUCT NET WEIGHT
0.145

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053069868

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
86

PACKAGING WIDTH
155

PACKAGING LENGTH
306

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
4.079

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.45


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

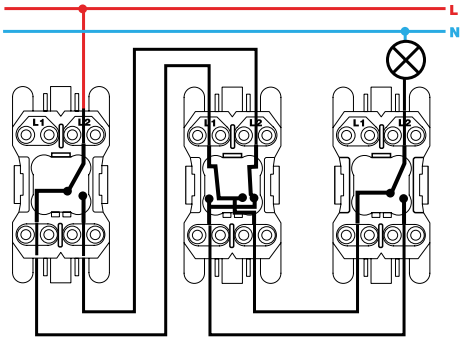


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

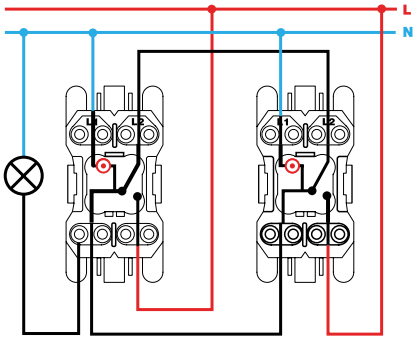


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

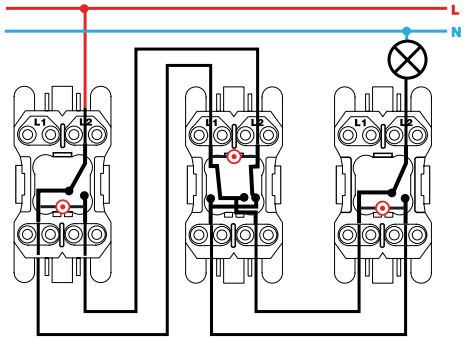

Conmutador cruce / Intermediate switch
XX2700254-XX