


## Single-pole switch 16AX 230V~ with built-in pilot light white Simon 270

REF. 20000102-090

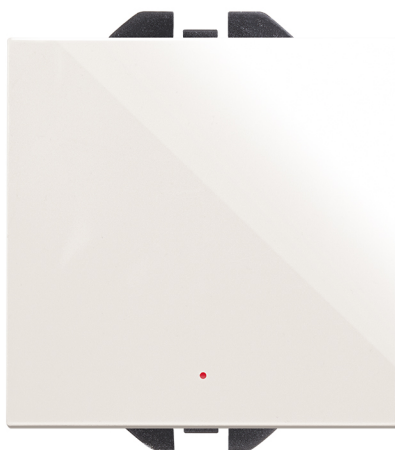

### BASIC INFORMATION

#### DESCRIPTION

Discover the Simon iO blinds switch with slender rocker 700 VA bronze Simon 270 from the Simon 270 series. A product designed to deliver functionality, compatibility and style for residential and commercial installations.

#### FINISH

White

#### MATERIAL

Plastic

#### PACKAGING CONTENTS

Mechanism, cover and instruction sheet

#### TYPE OF ROCKER

Large

#### COMPATIBILITY

Simon 270 frames

#### ETIM CLASS

EC001590

## TECHNICAL INFORMATION

|                                                          |                                                                                                                            |                                                      |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| <b>AVAILABLE MARKET</b><br>CE                            | <b>INDICATOR FUNCTION</b><br>Yes                                                                                           | <b>NOMINAL VOLTAGE (V~)</b><br>230 V~                |
| <b>CABLE SECTION ADMITTED (MM)</b><br>From 1,5 to 2,5 mm | <b>CURRENT (A)</b><br>16 AX                                                                                                | <b>OPERATING TEMPERATURE RANGE (°C)</b><br>5 - 45 °C |
| <b>CONSUMPTION INDICATOR (MA)</b><br>1 mA                | <b>IP RATING</b><br>IP20                                                                                                   | <b>POWER SUPPLY (V~)</b><br>230 V~                   |
| <b>NUMBER OF POSSIBLE ELEMENTS</b><br>1 element          | <b>MAINTENANCE</b><br>Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine. | <b>RAL</b><br>9003                                   |
| <b>FORMAT</b><br>Push-button                             | <b>TYPE OF MECHANISM</b><br>Pivoting                                                                                       | <b>STORAGE TEMPERATURE RANGE (°C)</b><br>-25 - 75 °C |
| <b>FREQUENCY</b><br>50 - 60 Hz                           |                                                                                                                            | <b>VOLTAGE (V~)</b><br>230 V~                        |

## INSTALLATION AND MAINTENANCE

|                                            |                                                             |                                                         |
|--------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------|
| <b>CABLE STRIPPING NECESSARY (MM)</b><br>7 | <b>INSTALLABLE IN FLUSH MOUNT JUNCTION BOX</b><br>Universal | <b>INSTALLATION TYPE</b><br>Suitable for flush mounting |
|                                            | <b>INSTALLATION DIRECTION</b><br>Horizontal, Vertical       | <b>TYPE OF TERMINAL CONNECTION - FUNCTION 1</b><br>Fast |

## REGULATIONS

### REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

## LOGISTICS INFORMATION

### UNITARY EAN CODE

8421053287149

### UNITARY PACKAGING WEIGHT UNIT

KGM

### PACKAGING MEASUREMENT UNIT

MMT

### UNITARY PACKAGING HEIGHT

0

### PACKAGING EAN

8421053287156

### PACKAGING VOLUME

0.713

### UNITARY PACKAGING WIDTH

0

### UNITS CONTAINED PACKAGING

5

### PACKAGING VOLUME UNIT

DMQ

### UNITARY PACKAGING LENGTH

0

### PACKAGING HEIGHT

47.75

### PACKAGING GROSS WEIGHT

0

### UNITARY PACKAGING VOLUME

0

### PACKAGING WIDTH

57

### PACKAGING NET WEIGHT

0.16

### UNITARY PACKAGING GROSS WEIGHT

0.032

### PACKAGING LENGTH

262

### PACKAGING WEIGHT UNIT

KGM

### PRODUCT NET WEIGHT

0.032

