
# Keypad 4 DALI-2 S270 Titanio

REF. **89000160-096**

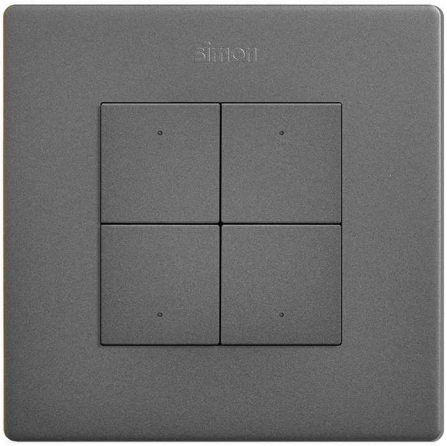

## BASIC INFORMATION

### DESCRIPTION

DALI-2 four-button keypad. The keypad is powered via the DALI bus, drawing a typical current of 5 mA and a maximum current of 25 mA. It is installed in a flush-mounted box for mechanisms, on a Simon S|270 frame. The keypad is pre-configured to operate without needing to be addressed. Once addressed, it allows configuring the type of press (single, double or long) via the DALI-2 controller. It has an LED indicator on each button. Operating temperature range is 0 – 40 ºC and maximum relative humidity is 90%. Dimensions: 49 x 45 x 45 mm. IP 20 protection rating. Titanium finish.

### FINISH

Titanium

### COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

## TECHNICAL INFORMATION

**IP RATING**
IP20

**POWER SUPPLY (V~)**
DALI bus (12 Vdc – 20,5 Vdc)

**CONTROL**
DALI2

## LOGISTICS INFORMATION

**UNITARY EAN CODE**
8421053323236

**UNITARY PACKAGING HEIGHT**
0

**UNITARY PACKAGING WIDTH**
0

**UNITARY PACKAGING LENGTH**
0

**UNITARY PACKAGING VOLUME**
0

**UNITARY PACKAGING GROSS WEIGHT**
0

**PRODUCT NET WEIGHT**
0.051

**UNITARY PACKAGING WEIGHT UNIT**
KGM

**PACKAGING EAN**
8421053323236

**UNITS CONTAINED PACKAGING**
1

**PACKAGING HEIGHT**
80

**PACKAGING WIDTH**
55

**PACKAGING LENGTH**
55

**PACKAGING MEASUREMENT UNIT**
MMT

**PACKAGING VOLUME**
242000

**PACKAGING VOLUME UNIT**
MMQ

**PACKAGING GROSS WEIGHT**
0.077

**PACKAGING NET WEIGHT**
0.051

**PACKAGING WEIGHT UNIT**
KGM