


## Trim plate for 1 XLR connector male or female for 1 element aluminium Simon K45

REF. K122/8

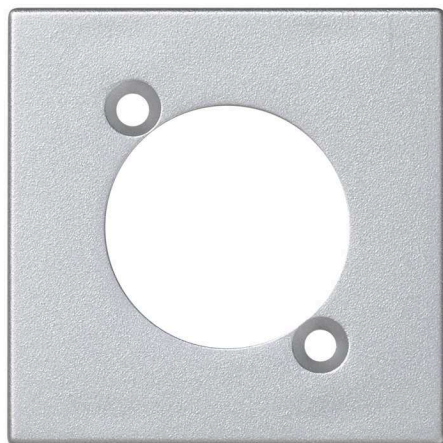

## BASIC INFORMATION

### DESCRIPTION

Simon constantly performs modularity and flexibility studies. Its installation is expandable and configurable according to every connection need in electrical, voice, data and multimedia. This is often required in a minimum work space, the use of few or any tools for its installation and a maximum functionality. This is added to the creativity in design and total Integration in the environment. It is a trim plate for 1 male or female XLR connector, 1 element. Aluminium finish, Simon K45 range. The connector is not included (to be purchased separately). The plate includes 5-mm diameter housings for fastening the connector to the plate with screws. Plate Individual. Suitable for surface mounting and flush mounting. Resistant to corrosion and extreme temperatures (-5 to 60 °C). Halogen-free thermoplastic that guarantees no flame propagation in case of fire and low toxicity in case of smoke dimensions 45 x 45 x 8.5 mm Clean with dry cloths without chlorine added. Easy maintenance.

### FINISH

Aluminium

### MATERIAL

Plastic

### COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-033)

### PACKAGING CONTENTS

Plate for 1 XLR connector

### ETIM CLASS

EC000018

### REMARKS

Connector not included (to be purchased separately). The plate includes 5-mm diameter housings for fixing the connector to the plate with screws.

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### IP RATING

IP20

### TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60° C

### MAX TEMP DURING CONSTRUCTION WORK (°C)

+60° C

### KIT AVAILABILITY

No

### NUMBER OF MODULES

Half

### FORMAT

XLR

### MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

### VERSION

Single

### INDICATOR FUNCTION

No

## INSTALLATION AND MAINTENANCE

### TYPE OF FASTENING

Fixing by direct snap-fit, no tools needed

### INSTALLATION DIRECTION

Vertical according to the direction of the mechanisms

### REMOVAL OF THE PLATE

Only with tool

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-033)

### INSTALLATION TYPE

Suitable for surface and flush mounting

## REGULATIONS

### REGULATIONS

Dir. 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018

## LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.01

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING VOLUME

911400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8426436045125

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0.3

UNITS CONTAINED PACKAGING

20

PACKAGING GROSS WEIGHT

0.2

UNITARY PACKAGING VOLUME  
UNIT

MMQ

PACKAGING HEIGHT

70

PACKAGING NET WEIGHT

0.2

UNITARY PACKAGING GROSS  
WEIGHT

0.01

PACKAGING WIDTH

93

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

140