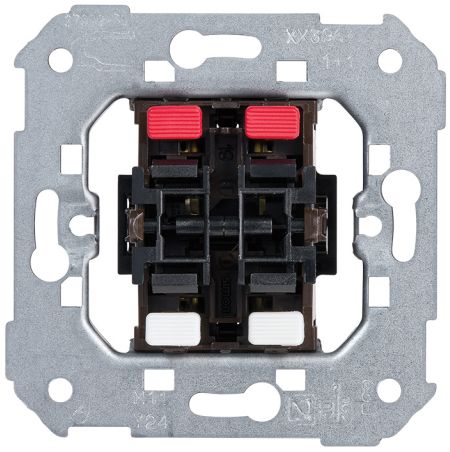
Group of 2 push buttons 10 A 250V~ (2 inputs + 2 outputs), suitable for shutter mechanisms without interlocking system with quick connector Simon 75

REF. **75396-39**



BASIC INFORMATION

DESCRIPTION

The Group of two push buttons with a current of 10 AX and voltage of 250V~ that includes two inputs and two outputs meets market demands. It is suitable for blind mechanisms without an interlocking system with quick terminal connection. We are looking at a valid mechanism for products included in the Simon 75 and 82 series. For its installation, the use of a universal flush-mounted box is necessary, or alternatively, a surface socket is required and it needs a control device. Designed to withstand extreme environmental conditions thanks to the metallic components with thermoplastic insulation free of halogens with which it has been manufactured. Its technical characteristics are completed with a cable section of 1.5 to 2.5 mm and a cable stripping of 11 mm. Maximum quality at the best price.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept, and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC000029

REMARKS

Mechanism equipped without interlocking. Requires control device.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF CONTACTS

4

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

No

CURRENT (A)

10 A

IP RATING

IP21

LATCH TYPE

Non-latching

LINKABLE

No

TYPE OF MECHANISM

Pivoting

MONOBLOCK

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

RECESS DIMENSION (MM)

30

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Double

VOLTAGE (V~)

250 V~

NUMBER OF WIRES

4

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

REMOVAL OF COVER

Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053256015

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.063

PRODUCT NET WEIGHT
0.063

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053017555

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
83

PACKAGING WIDTH
165

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

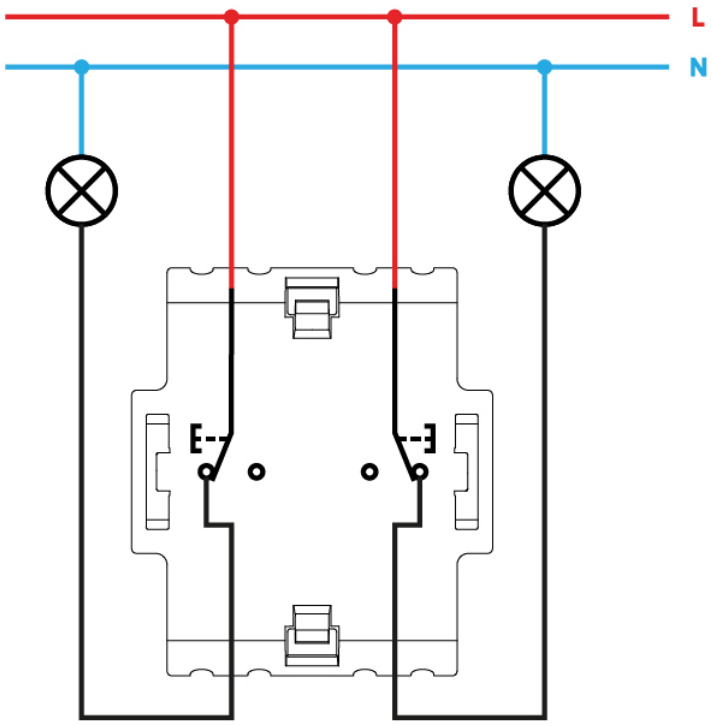
PACKAGING VOLUME
3026595

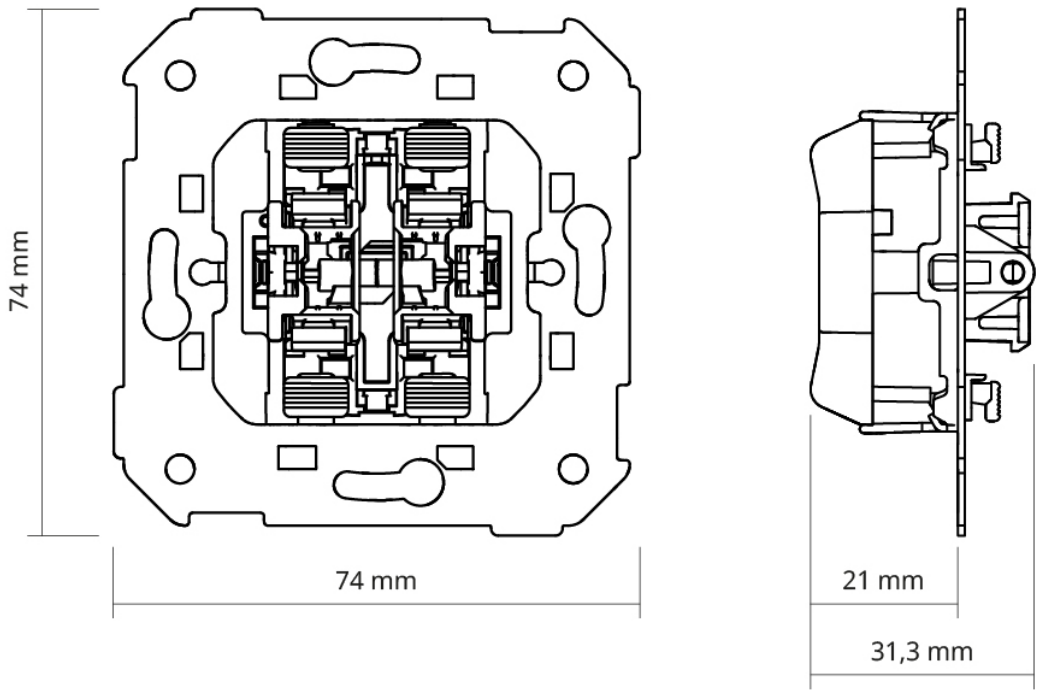
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.635

PACKAGING NET WEIGHT
0.63

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
21 mm
31,3 mm