


Touch LightKeypad button box 8 functions (6 digits plus up and down) white Simon Scena

REF. 89000150-030

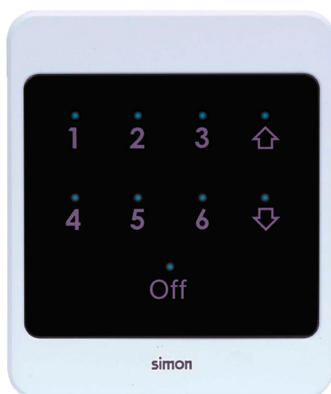

BASIC INFORMATION

DESCRIPTION

Keypad Touch LightKeypad 8 functions (6 digits plus up and down) is finished in white and included in the series Simon Scena. As say, it is a mechanism that has 8 actions plus off, fitted with an IR input and compatible with the Simon 75350-69 remote control. This article is manufactured in compliance with the regulation. It is advisable to install it in environments with a temperature range between 0 and 45°C for a better conservation of this product, it works with a power of 12 VDC -DMX. In terms of its programming, this can be carried out from Touch Light Manager: Channels, groups, scenarios, sequences, etc. It is also very important maintenance to prolong its service life. To do this, use a soft cloth slightly moistened in soapy water. Also, avoid those cleaners that contain chlorine and could damage this item.

FINISH

White

PACKAGING CONTENTS

Touch LightKeypad, frame holder and instructions

ETIM CLASS

EC002466

COMPATIBILITY

Touch Light Manager

REMARKS

Fitted with an IR input and compatible with SIMON 75350-69 remote control.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

BASIC CHARACTERISTICS

8 actions plus everything off, 6 digits plus up and down.

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

MAXIMUM NUMBER OF CHANNELS

1

TYPE OF MECHANISM

Requires connection to Touch Light Manager, Touch pulse

OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

OPERATION

8 actions plus off

POWER SUPPLY (V~)

12 VDC/DMX

SIGNALLING FUNCTION

Yes

STORAGE TEMPERATURE RANGE (°C)

0 - 45 °C

USE

Short press for On/Off

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

CABLE CHARACTERISTICS DATA

Multicore AWG 24; 2 shielded twisted pairs with impedance of 120 Ohms

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Semi-flush mount; requires universal flush-mount box.

REGULATIONS

REGULATIONS

UNE-EN 50491-3:2010 + 2004/108/CE + 2006/95/CE

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053096437

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053096437

PACKAGING VOLUME

262.5

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

CMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

25

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

100

PACKAGING NET WEIGHT

0.112

UNITARY PACKAGING GROSS
WEIGHT

0.112

PACKAGING LENGTH

105

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.112