


USB 2.0 connector type A aluminium Simon 270

REF. 20000090-093

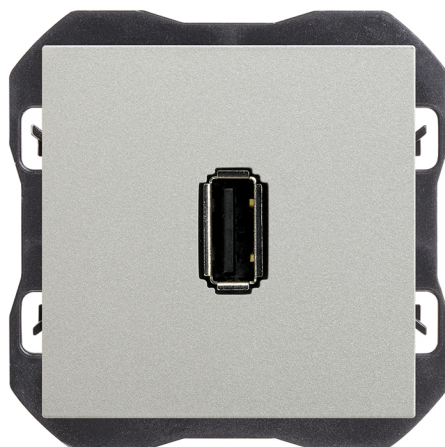

BASIC INFORMATION

FINISH

Matt aluminium

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000018

MATERIAL

Thermoplastic

PACKAGING CONTENTS

USB connector, cover and
instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

RAL

9006

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE

(°C)

-25 - 50 °C

CONNECTOR TYPE

USB

USB CHARACTERISTICS

v2.0

NUMBER OF POSSIBLE

ELEMENTS

1 element

TYPE OF MECHANISM

Insertion

USB PORT TYPE

A

FORMAT

USB

OPERATING TEMPERATURE

RANGE (°C)

5 - 45 °C

INSTALLATION AND MAINTENANCE

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION DIRECTION

Horizontal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

INSTALLATION TYPE

Suitable for flush mounting

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053264560

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.048

PRODUCT NET WEIGHT

0.048

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053264560

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

80

PACKAGING WIDTH

55

PACKAGING LENGTH

55

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

242000

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.048

PACKAGING WEIGHT UNIT

KGM



GND - 

D +

D -

R - Derecha / Direita / Droit / Right

+5V - VBUS (5V)

SH - Malla /Shell

