


Single-pole switch 10AX 230V~ with narrow rocker and built-in pilot light matt black Simon 270

REF. 20001102-098

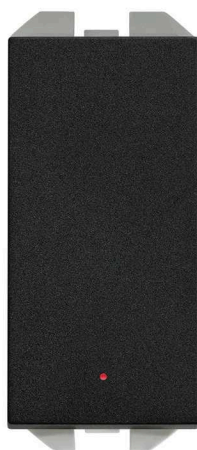

BASIC INFORMATION

FINISH

Matt black

TYPE OF ROCKER

Slender

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 270 frames

PACKAGING CONTENTS

Mechanism, cover and instruction sheet

ETIM CLASS

EC001590

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 45 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

POWER SUPPLY (V~)

230 V~

TYPE OF COVER

Slender

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

RAL

9005

NUMBER OF POSSIBLE ELEMENTS

Half element

STORAGE TEMPERATURE RANGE (°C)

-25 - 75 °C

FREQUENCY

50 - 60 Hz

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

127/230 V~

INDICATOR FUNCTION

Yes

NOMINAL VOLTAGE (V~)

230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

15

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for flush mounting

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053287163

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053287170

PACKAGING VOLUME

713098.5

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

47.75

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

57

PACKAGING NET WEIGHT

0.01

UNITARY PACKAGING GROSS
WEIGHT

0.001

PACKAGING LENGTH

262

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.001

