


**Front kit for 3 elements with 1 German socket outlet, 1
2xUSB charger, 1 blinds rocker and 1 rocker gloss black
Simon 100**

REF. 10020306-138

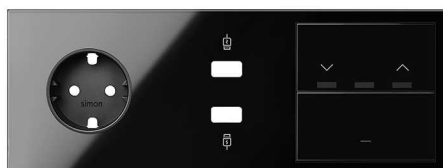

BASIC INFORMATION

DESCRIPTION

This front kit designed to occupy 3 elements has a 1 Schuko plug, and two USB charger sockets, 1 key, blinds and 1 key, all in black and an elegant glossy finish, is part of the Simon 100 range and being compatible with all the elements of this range.

The type of connection is b click and the USB by screw. The type of activation is by insertion. This device can be placed vertically and horizontally. For maintenance, it must be preserved in a temperature range of 5 to 40 ° C for operation and a temperature range of -25 to 50 ° C for storage.

It has been developed following regulations 2014/35 / UE LVD + directive 2014/30 / UE EMC + directive 2011/65 / UE RoHS + EN 50581: 2012 + EN 60669-1: 1999 + EN 60669-1: 1999 A1: 2002 + EN 60669-1: 1999 A2: 2008 * 2 + EN 60950-1: 2006 + EN 60950-1: 2006 A11: 2009 + EN 60950-1: 2006 A1: 2010 + EN 60950-1: 2006 A12: 2011 + EN 60950-1: 2006 A2: 2011 * 3 + ETSI-EN 301489-34 v14.1 * 3 + IEC 60884-1 Ed. 3.2 * 1 and is ready to be marketed in the EC.

FINISH

Gloss black

COMPATIBILITY

Kit mechanisms Simon 100

MATERIAL

Thermoplastic

ETIM CLASS

EC000007

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

3 elements

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

FORMAT

Schuko,USB

MONOBLOCK

Yes

VERSION

3 elements

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

INSTALLATION DIRECTION

Vertical and horizontal

INSTALLATION TYPE

Suitable for flush mounting

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-1:1999 + EN 60669-1:1999 A1:2002 + EN 60669-1:1999 A2: 2008*2 + EN 60950-1:2006 + EN 60950-1:2006 A11:2009 + EN 60950-1:2006 A1:2010 + EN 60950-1:2006 A12:2011 + EN 60950-1:2006 A2:2011*3 + ETSI-EN 301489-34 v14.1*3 + IEC 60884-1 Ed. 3.2*1

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053147726

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.133

PRODUCT NET WEIGHT

0.133

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053147726

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

25.3

PACKAGING WIDTH

226

PACKAGING LENGTH

84

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

480295.2

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.133

PACKAGING NET WEIGHT

0.133

PACKAGING WEIGHT UNIT

KGM