

Downlight 703.21 Round Comfort NW Spot White

REF. 70321030-284



BASIC INFORMATION

APPLICATION

Hotel, Restaurants, Residential, Retail, Office, Healthcare, Education

PACKAGING CONTENTS

1 unit

ETIM CLASS

EC001744

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

CUT OFF

No

LUMENS/W

680 lm/7.5 W

IP RATING

IP44

DRIVER INCLUDED

Yes

OPTICS

Spot

OPERATING TEMPERATURE RANGE (°C)

15 - 35 °C

L70 (°C)

30,000 h at 25 °C

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

POWER SUPPLY (V~)

230 V~

LIGHT BEAM APERTURE ANGLE (°)

20°

POWER (W)

7.5 W

COLOR TEMPERATURE (K)

4000 K

COLOR TYPE

NW

SERVICE LIFE

30.000 h

CONTROL

On/Off

LIGHTING EFFICIENCY (LM/W)

91 lm/W

CRI

80


LUMENS (LM)

680 lm


CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – CONICAL

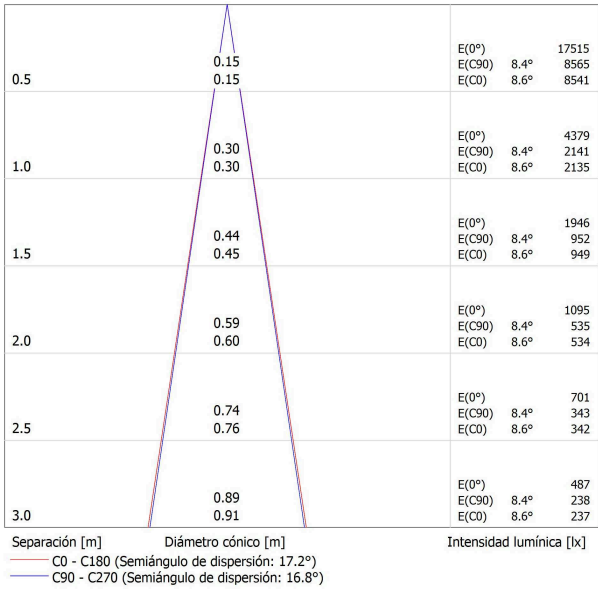

PHOTOMETRY ASSETS – POLAR

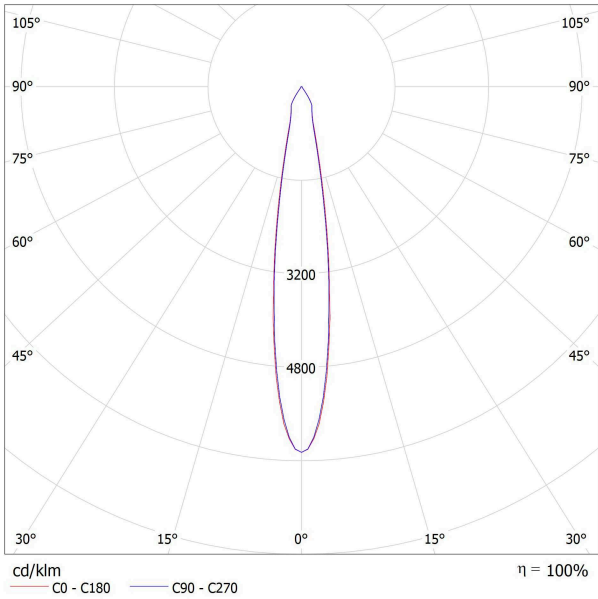

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE

Flush-mount

REGULATIONS

WARRANTY

3 years

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053088333

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053088333

PACKAGING VOLUME

2524500

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

110

PACKAGING GROSS WEIGHT

0.345

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

135

PACKAGING NET WEIGHT

0.225

UNITARY PACKAGING GROSS
WEIGHT

0.345

PACKAGING LENGTH

170

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.225