


Double-pole switch 16AX 250V~ with Faston/welding terminal connection system and trim plate graphite Simon K45

REF. K125A/14

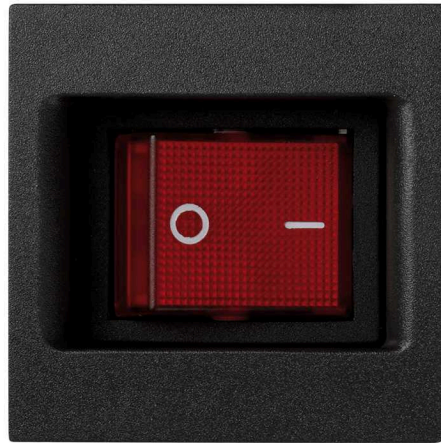

BASIC INFORMATION

DESCRIPTION

With Faston / Welding and rocker operation, the two-pole switch and trim plate in graphite finish of the Simon 27 series offers the highest guarantee in our facilities. This mechanism is suitable for surface and flush mounting and includes engraving I / O A current of 16 AX and a voltage of 250V ~, support a cable section up to 1 ' 5 mm and stripping of 11 mm are the wire formal features of its structure, which consists of two modules. With dimensions of 45x45 mm, this double-pole switch has been manufactured with the best materials with metal components with halogen-free insulation and thermoplastic trim. Its competitive price makes it the best option to be installed in large buildings with a high number of points of connecting the electrical systems.

FINISH

Graphite

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Mechanism with plate, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP21

RAL

7021

CABLE SECTION ADMITTED (MM)

Up to 1,5 mm

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 item

TYPE OF MECHANISM

Tilting

VERSION

Single

INDICATOR FUNCTION

No

VOLTAGE (V~)

250 V~

CURRENT (A)

16 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION DIRECTION

Vertical according to the
direction of the mechanisms

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Faston - Solder

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, specific Simon K45
and specific Simon 500 Cima
using adaptor (ref.50012088-
038)

INSTALLATION TYPE

Suitable for surface and flush
mounting

REGULATIONS

REGULATIONS

EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8426436046474

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

147206

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.03

PRODUCT NET WEIGHT

0.03

UNITARY PACKAGING WEIGHT UNIT

KGM

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

88

PACKAGING WIDTH

123

PACKAGING LENGTH

136

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1472064

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.3

PACKAGING NET WEIGHT

0.3

PACKAGING WEIGHT UNIT

KGM