

2-way switch 10AX 250V~ with built-in light and fast terminal connection system white Simon 31

REF. 31204-30



BASIC INFORMATION

DESCRIPTION

2-way switch with built in LED system and quick terminal connection, white in colour, series Simon 31. Its current is 10 A and works with a voltage of 250V and its operation is tilting type. This 2-way switch can be combined with the reference 31803-31 in case of replacement of the indicator light. It has 2 modules and supports a wire cross section of 1.5 to 2.5 mm, with a stripping of 11 mm and a signal consumption marked 1 mA. It can be installed in rooms with a temperature located between 5 and 40°C, although it can withstand extreme temperatures of -25 to 50°C, approximately. It is made of metal components with halogen-free insulation and thermoset trim, complying with the regulations UNE -s 60669-1: 2002 + A1: 2003 + A2: 2009. Its dimensions are 64x65 mm and to clean it, just need a soft and dry cloth, so that it is in perfect conditions.

FINISH

White

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Can be combined with article 31803-31 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

1 mA

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

NUMBER OF POSSIBLE ELEMENTS

1 element

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INDICATOR FUNCTION

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053005835

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.094

PRODUCT NET WEIGHT

0.094

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053005835

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

83

PACKAGING WIDTH

165

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

3026595

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.935

PACKAGING NET WEIGHT

0.94

PACKAGING WEIGHT UNIT

KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88

Mecanismos básicos / Basic switches



Interrupor unipolar / Single-pole switch
XXXX101-XXX



Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039



Interrupor bipolar / Double pole switch
XXXX133-XXX

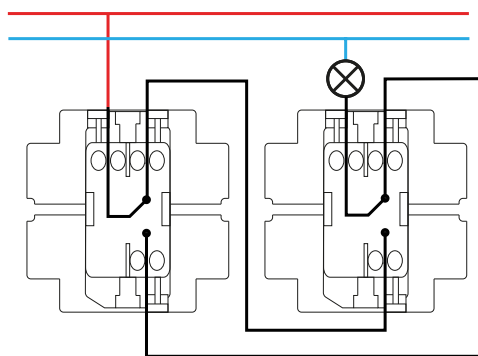

Conmutador / 2-way switch
XXXX201-XXX

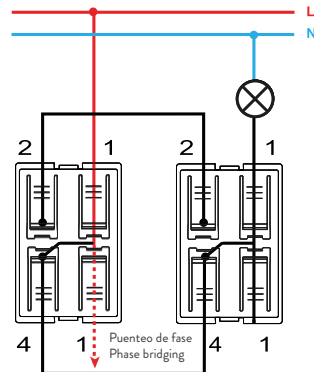

Conmutador / 2-way switch
7700201-039



Conmutador cruce / Intermediate switch
XXXX251-XXX



Conmutador cruce / Intermediate switch
7700251-039



Grupo 2 interruptores / 2 switches group
XXXX398-XXX



Pulsador desconexión / Push button disconnection switch
XXXX152-XXX



Grupo dos conmutadores / 2-way switches group
XXXX397-XXX



Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX



Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX



Interrupor unipolar / Single-pole switch
XXXX102-XXX



Interrupor con piloto / Push button pilot switch
7700112-039



Interrupor bipolar / Double pole switch
XXXX134-XXX



Conmutador / 2-way switch
XXXX202-XXX



Interruptor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX



Pulsador con luminoso / Push button switch with light
XXXX160-XXX



Pulsador con luminoso / Push button switch with light
7700160-039



Conmutador con luminoso / 2-way switch with light
XXXX204-XXX



Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX