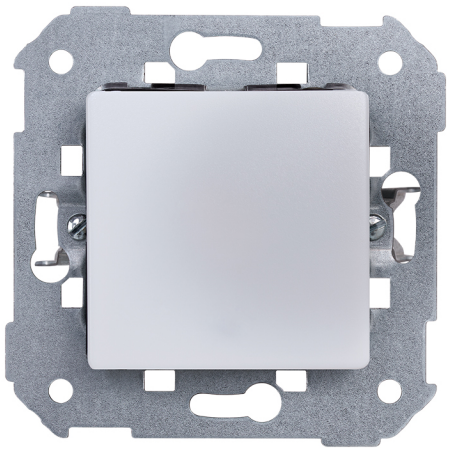
Timed push button 750 W/VA Simon 75

REF. **75325-39**



BASIC INFORMATION

DESCRIPTION

Timed push button of 750 W/VA that offers a screw terminal connection system. It features an adjustable timer function ranging from 4 seconds to 10 minutes to adapt to the specific needs of each user. The mechanism can be combined with mechanical auxiliary push buttons. It is suitable for surface mounting and flush mounting, offering a very simple installation that does not require advanced technical knowledge. The push button is equipped with electronic components with thermoplastic halogen-free insulation to ensure the safety of all household members. The mechanism is included in the Simon 75 series and has been manufactured in strict compliance with regulations. The collection combines design, technology, and efficiency, qualities that result in devices with a display that allow for control of various functions related to timing and clocking such as alarm clock, astronomical schedule, programming of shutters, and much more.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 27 Play, Simon 27 Scudo, Simon 27, Simon 31, Simon 44 Aqua, Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

COMPATIBLE WITH MECHANICAL 2-WAY/CROSSOVER SWITCH

No

COMPATIBLE WITH 230V INCANDESCENT AND HALOGEN LAMPS (W)

750 VA

COMPATIBLE WITH MECHANICAL PUSH BUTTON

Yes

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Push-button timer and instruction sheet

ETIM CLASS

EC000029

REMARKS

Allows it to be combined with mechanical auxiliary push buttons.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

ACOUSTIC FUNCTION
No

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
1.3 W

NUMBER OF CONTACTS
4

NUMBER OF CONTROLLABLE CIRCUITS
1

DISCONNECTION TIMER
4 seconds to 10 minutes

COMPATIBLE WITH ELECTRONIC AUXILIARY
No

COMPATIBLE WITH HALOGENS WITH ELECTRONIC TRANSFORMER (W)
350 VA

NUMBER OF POSSIBLE ELEMENTS
1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST
No

COMPATIBLE WITH FLUORESCENT LAMPS (VA)
460 VA Non-compensated

FREQUENCY
50 - 60 Hz

INDICATOR FUNCTION
Yes

IP RATING
IP20

LINKABLE
No

COMPATIBLE WITH LOW CONSUMPTION (W)
78 VA

MAXIMUM QUANTITY PER CIRCUIT
1

MONOBLOCK
Yes

COMPATIBLE WITH MOTORS (VA)
3 A

NOMINAL VOLTAGE (V~)
230 V~

OPERATING TEMPERATURE RANGE (°C)
0 - 40 °C

POWER SUPPLY (V~)
230 V~

RECESS DIMENSION (MM)
40

STORAGE TEMPERATURE RANGE (°C)
-20 - 75 °C

VERSION
Single

VOLTAGE (V~)
230 V~

NUMBER OF WIRES
3

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
10

CLAW
Included

REMOVAL OF COVER
Only with tool

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2014/30/UE EMC|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-2-1:2004|EN 60669-2-1:2004 A1:2009|EN 60669-2-1:2004 A12:2010|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053029299

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
329232

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.095

PRODUCT NET WEIGHT
0.095

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053029299

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

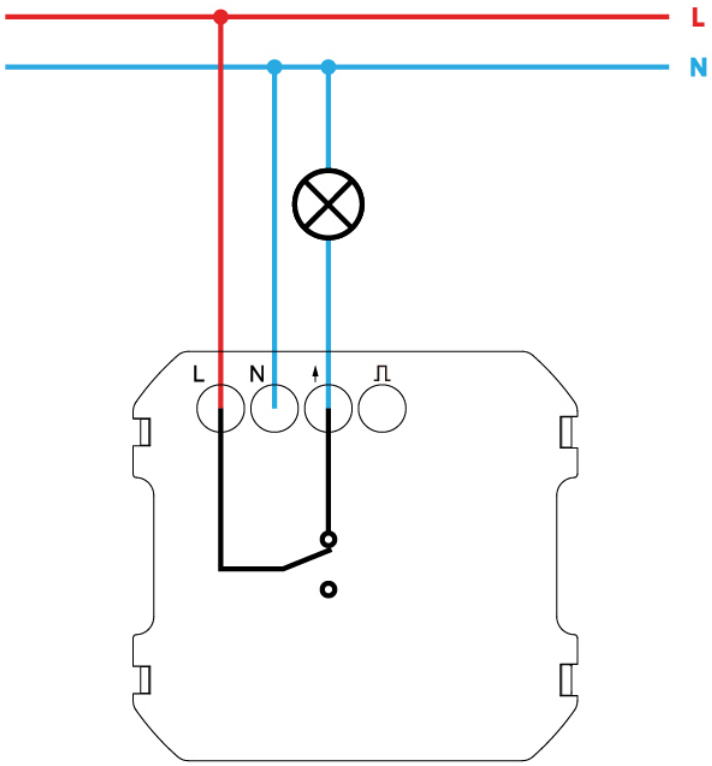
PACKAGING VOLUME
0.329

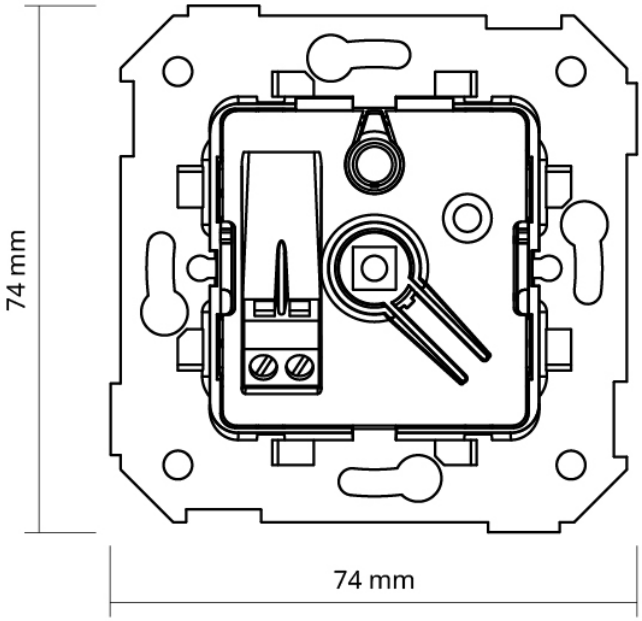
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0.1

PACKAGING NET WEIGHT
0.095

PACKAGING WEIGHT UNIT
KGM


L
N
L
N


74 mm
74 mm