


Courtesy beacon composed of LEDs Simon 75

REF. 75370-39

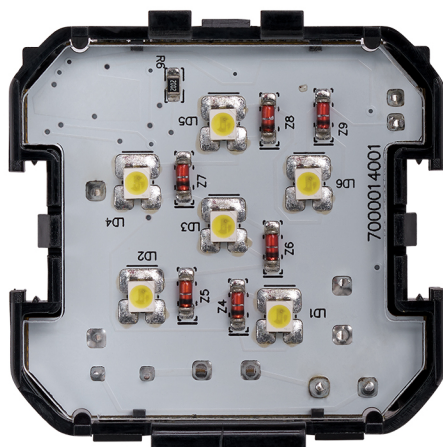

BASIC INFORMATION

DESCRIPTION

The courtesy beacon made of LEDs, from the extensive range of Simon 75 products. For its proper functioning, it must be connected to a power supply of 250 V~, please note that the allowable cable gauge is from 1.5 to 2.5 mm, it comes with 6 mm of stripped cable and the luminous beam is 11 lux. For its installation, it will be enough to place the beacon on the surface or apply pressure. The material it is made from is based on metal components with halogen-free thermoplastic insulation, capable of reaching temperatures ranging between 0 and 40°, and can withstand a maximum of between -20° minimum and 75° C maximum. It complies with all safety systems according to the current UNE-EN 61000-3-3:2009 regulation.

MATERIAL

Plastic, Metal

COMPATIBILITY

Marcos Simon 75, Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82

PACKAGING CONTENTS

Courtesy light and instruction sheet

ETIM CLASS

EC000064

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INDICATOR FUNCTION

Yes

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

COMPATIBLE 12V AC/DC

Yes

CURRENT (A)

0,12 A

POWER SUPPLY (V~)

12/230 Vac/dc

COMPATIBLE 230V AC/DC

Yes

IP RATING

IP20

REAR INPUT VIA TERMINALS

Yes

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LIGHT BEAM

Yes

RECESS DIMENSION (MM)

35

NUMBER OF CONTACTS

2

LINKABLE

Yes

STORAGE TEMPERATURE RANGE (°C)

-20 - 75 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAXIMUM QUANTITY PER CIRCUIT

No limitation

VERSION

Single

FREQUENCY

50 Hz

NOMINAL VOLTAGE (V~)

230 V~

NUMBER OF WIRES

2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

6

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Not possible

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REMOVAL OF COVER

Only with tool

REGULATIONS

REGULATIONS

UNE-EN 61000-3-3:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053068915

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

267325

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.05

PRODUCT NET WEIGHT

0.05

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053068915

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

85

PACKAGING WIDTH

37

PACKAGING LENGTH

85

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

267.325

PACKAGING VOLUME UNIT

CMQ

PACKAGING GROSS WEIGHT

0.045

PACKAGING NET WEIGHT

0.05

PACKAGING WEIGHT UNIT

KGM

