


Custom button box 2 functions for lighting control cold aluminium Simon 82 Sense

REF. 8000625-093

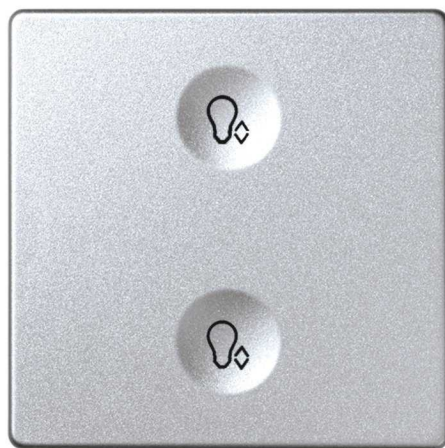

BASIC INFORMATION

FINISH

Matt aluminium

PACKAGING CONTENTS

Keypad and instructions

MATERIAL

Thermoplastic

ETIM CLASS

EC000205

REMARKS

Requires installation on LON or KNX bus coupling unit (8000100-039 or 8400100-039). Possibility of customising and creating your own configuration by choosing the functions you need from our icon library.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

CURRENT (A)

6,2 mA

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Touch

OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

POWER SUPPLY (V~)

24 Vdc

RELATIVE HUMIDITY

From 20 to 85% (without condensation)

SLIDE CONTROL

No

SOUND FEEDBACK

Yes

STORAGE TEMPERATURE RANGE (°C)

25 - 70 °C

VIBRATION FEEDBACK

Yes

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + Directive 2014/30/UE EMC + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60669-2-5:2016

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053128558

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING GROSS WEIGHT

0.033

PRODUCT NET WEIGHT

0.033

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053128558

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

26

PACKAGING WIDTH

58

PACKAGING LENGTH

86

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

129.688

PACKAGING VOLUME UNIT

CMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT

0.033

PACKAGING WEIGHT UNIT

KGM