


Bus coupling unit with LON system

REF. 8000100-039

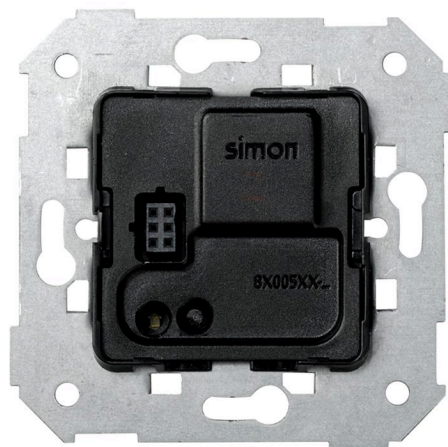

BASIC INFORMATION

PACKAGING CONTENTS

Coupling unit and instructions

ETIM CLASS

EC000634

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

INPUT TYPE

Digital, volt-free

POWER SUPPLY (V~)

24 Vdc

CABLE SECTION ADMITTED (MM)

From 0,5 to 2,5 mm

CURRENT (A)

27,6 mA

PROTOCOL

LonWorks

NUMBER OF POSSIBLE ELEMENTS

1 element

IP RATING

IP20

PROGRAMMING PUSH BUTTON

Yes

INDICATOR FUNCTION

No

MAXIMUM VOLTAGE AT THE INPUT (VCC)

24 V DC

RELATIVE HUMIDITY

From 20 to 85% (without condensation)

INPUT INTENSITY (MA)

12

OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

STORAGE TEMPERATURE RANGE (°C)

25 - 70 °C

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

CLAW

Optional

INSTALLATION TYPE

Suitable for surface and flush mounting

CABLE STRIPPING NECESSARY (MM)

8

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

EN 50428; EN 60669; EN 50491-1; EN 50491-2

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053125571

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053125571

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

57

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

76

PACKAGING NET WEIGHT

0.1

UNITARY PACKAGING GROSS
WEIGHT

0.1

PACKAGING LENGTH

76

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.1