

Downlight 715.22 Flush mount NW General

REF. 71522030-984



BASIC INFORMATION

DESCRIPTION

The Downlight 715 flush-mounted NW GENERAL in white finish with optics improves the conditions of indoor lighting in the headquarters of companies and homes, commercial premises injury. In what translates this situation? In an increase the profitability of workers and the comfort of customers. This is an element with the following features: Control electrical ON-OFF, power of 220-240 V and detailed frequency of 50 Hz, lumens watt of 1800 lm / 20 W The weight of the luminaire is release 1.25 kg, in addition to having dimensions of 230 mm () x 37 mm Thanks to all these features, it can reach a energy efficiency in the electrical installations in the different spaces from the first day. Also, the low price of this Downlight makes it affordable for projects with all kinds of budgets with amounts.

APPLICATION

General lighting

PACKAGING CONTENTS

1 unit

REMARKS

Rising heat dissipation, does not damage the wall.

TECHNICAL INFORMATION

FREQUENCY

50 Hz

CRI

80

LIGHTING EFFICIENCY (LM/W)

90 lm/W

IP RATING

IP20

DIRECTIONAL

No

LUMENS (LM)

1800 lm

OPERATING TEMPERATURE RANGE (°C)

-15 - 35 °C

DRIVER INCLUDED

Yes

LUMENS/W

1800 lm/20W

POWER SUPPLY (V~)

220/240 V~

ELECTRICAL CLASS

Type 2

OPTICS

General

COLOR TEMPERATURE (K)

4000 K

INTEGRATED POWER SUPPLY

Yes

PHOTOBIOLOGICAL CLASSIFICATION

Exempt category

CONTROL

On/Off

L70 (°C)

30,000 h at 25 °C

POWER (W)

20 W

COS Φ

0.95

COLOR TYPE

NW

SERVICE LIFE

30.000 h

CHROMATICS CRI ICONS


CRI
80

PHOTOMETRY ASSETS – CONICAL

0.5	1.06 1.06	E(0°) 3095 E(C90) 503 E(C0) 500
1.0	2.11 2.12	E(0°) 774 E(C90) 126 E(C0) 125
1.5	3.17 3.18	E(0°) 344 E(C90) 56 E(C0) 56
2.0	4.23 4.24	E(0°) 193 E(C90) 31 E(C0) 31
2.5	5.29 5.31	E(0°) 124 E(C90) 20 E(C0) 20
3.0	6.34 6.37	E(0°) 86 E(C90) 14 E(C0) 14

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]
 — C0 - C180 (Semiángulo de dispersión: 93.4°)
 — C90 - C270 (Semiángulo de dispersión: 93.2°)

PHOTOMETRY ASSETS – POLAR

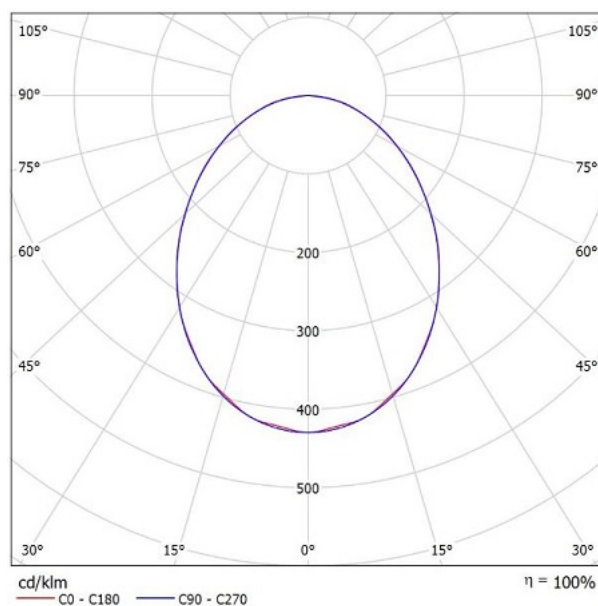

INSTALLATION AND MAINTENANCE

MINIMUM INSTALLATION HEIGHT

45

INSTALLATION TYPE

Flush mount

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

WARRANTY

3 years 30,000 h

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053145197

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053145197

PACKAGING VOLUME

4730250

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

70

PACKAGING GROSS WEIGHT

0.69

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

265

PACKAGING NET WEIGHT

0.44

UNITARY PACKAGING GROSS
WEIGHT

0.69

PACKAGING LENGTH

255

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.44