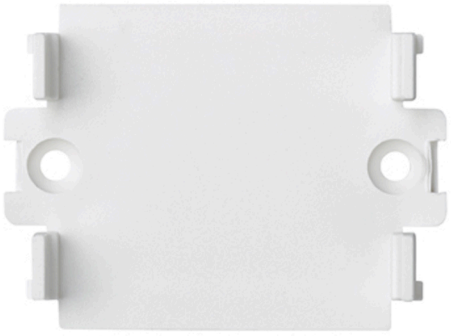
DIN rail adaptor for MCB or RCCB installation in floor box Simon 500 Cima

REF. **50010076-039**



BASIC INFORMATION

DESCRIPTION

With the adapter DIN rail for miniature circuit breaker or residual current circuit breaker of the collection Simon 500 Cima you will get the maximum workplace solutions and functionality for its floor box in the work area. Made up of 2 elements and with a size of 138 x 48 mm and a depth of 14mm, it is suitable for installation in floor boxes wall-mounted of, both in concrete floor and raised floor. Its compact and its finishes in a homogeneous always white colour, guarantee total integration of the set in all types of spaces compact. It is manufactured in halogen-free thermoplastic for greater protection in case of fire, as it avoids the flame spread and toxicity by smoke. Also, it has a temperature range of -5 to 60 ° C and can reach a maximum of 90 °C. Functionality, innovation and design in the adapter Simon 500 Cima as a guarantee of workplace solutions and security in its working area.

FINISH

White

COMPATIBILITY

Floor boxes Simon 500 Cima

ETIM CLASS

EC001024

MATERIAL

Plastic

PACKAGING CONTENTS

DIN rail adaptor for installing in Simon 500 Cima floor boxes and installation manual

REMARKS

Is only suitable for installation in Simon 500 Cima floor boxes If installing in another enclosure you must use article no.50000074-03X.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

Adaptor specifically for floor boxes, with another version for other Simon 500 Cima enclosures (wall boxes, mini towers, mini columns, columns, metal enclosures)

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

FORMAT

DIN

IP RATING

IP20

KIT AVAILABILITY

Yes

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

RAL

9003

VERSION

2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
Using screws supplied with the adaptor

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for installing in floor boxes, either concrete or raised floor

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + Directive 2011/65/UE RoHS + EN 50581:2012 + EN 60898-1:2003 + EN 60898-1:2003 A1:2004 + EN 60898-1:2003 A11:2005 + EN 60898-1:2003 A12:2008 + EN 60898-1:2003 A13:2012

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.01

PRODUCT NET WEIGHT
0.01

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053102183

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

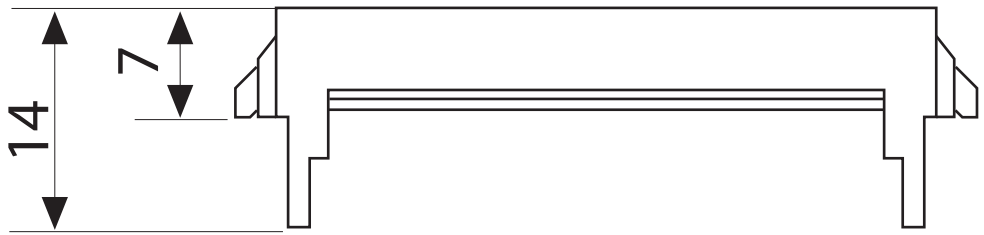
PACKAGING VOLUME
0.911

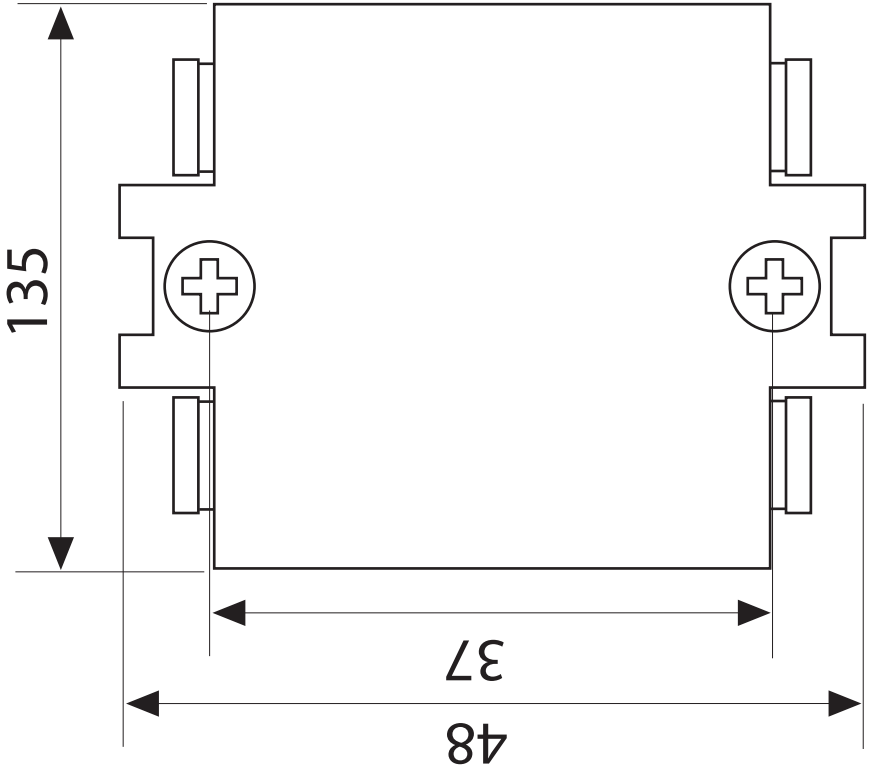
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.1

PACKAGING WEIGHT UNIT
KGM


14
7


135
37
48