Framework for 2 elements in adjustable floor box white Simon 500 Cima

REF. **52051801-030**



BASIC INFORMATION

DESCRIPTION

The new frame holder mechanisms for two elements in adjustable floor box Simon 500 Cima in White, has a more integrated design and appeal response to the most innovative on the market, with the versatility of an installation suitable for both recessed in concrete floor and raised floor, the frame holder for Simon 500 Cima, is composed of halogen-free thermoplastic that prevents the no flame propagation and toxicity by smoke in case of fire. Thanks to the thermoplastic, the frame holder for Simon 500 Cima, you can reach temperatures ranging from -5 ºC and 60 ° C and even brush the most of 90 ºC. With a size of 132 x 76 x 16 mm, a design of clean lines and minimalist, its finishes in a white tones and the ease of installation and usability, the frame holder for Simon 500 Cima, it is the perfect solution to give your room of the greater security, innovation and style.

FINISH

White

MATERIAL

Plastic

COMPATIBILITY

Simon 500 Cima and Simon 27 Play/Simon K45 mechanisms (using a specific adaptor)

PACKAGING CONTENTS

Framework

ETIM CLASS

EC000007

REMARKS

The adjustable floor boxes include the framework. You only need to order it as a spare part in the event of breakage or loss.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

AVAILABLE IN

2, 4, 6 and 8 elements

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)

+90 ºC

HEAT RESISTANCE (ºC)

+125ºC (according rule IEC 60695-10-2)

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

KIT AVAILABILITY

No

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)

-5 to 60 ºC

NUMBER OF MODULES

2 modules

RAL

9003

VERSION

2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COMPONENTS
Only with tool

TYPE OF FASTENING
Using screws

INSTALLATION DIRECTION
Horizontal, Vertical

EXTINGUISHING (°C)
+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

REMOVAL OF THE FRAME
Only with tool

INSTALLATION TYPE
In concrete floor and raised floor through the adjustable floor boxes

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.05

PRODUCT NET WEIGHT
0.05

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093214

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
95

PACKAGING WIDTH
155

PACKAGING LENGTH
195

PACKAGING MEASUREMENT UNIT
MMT

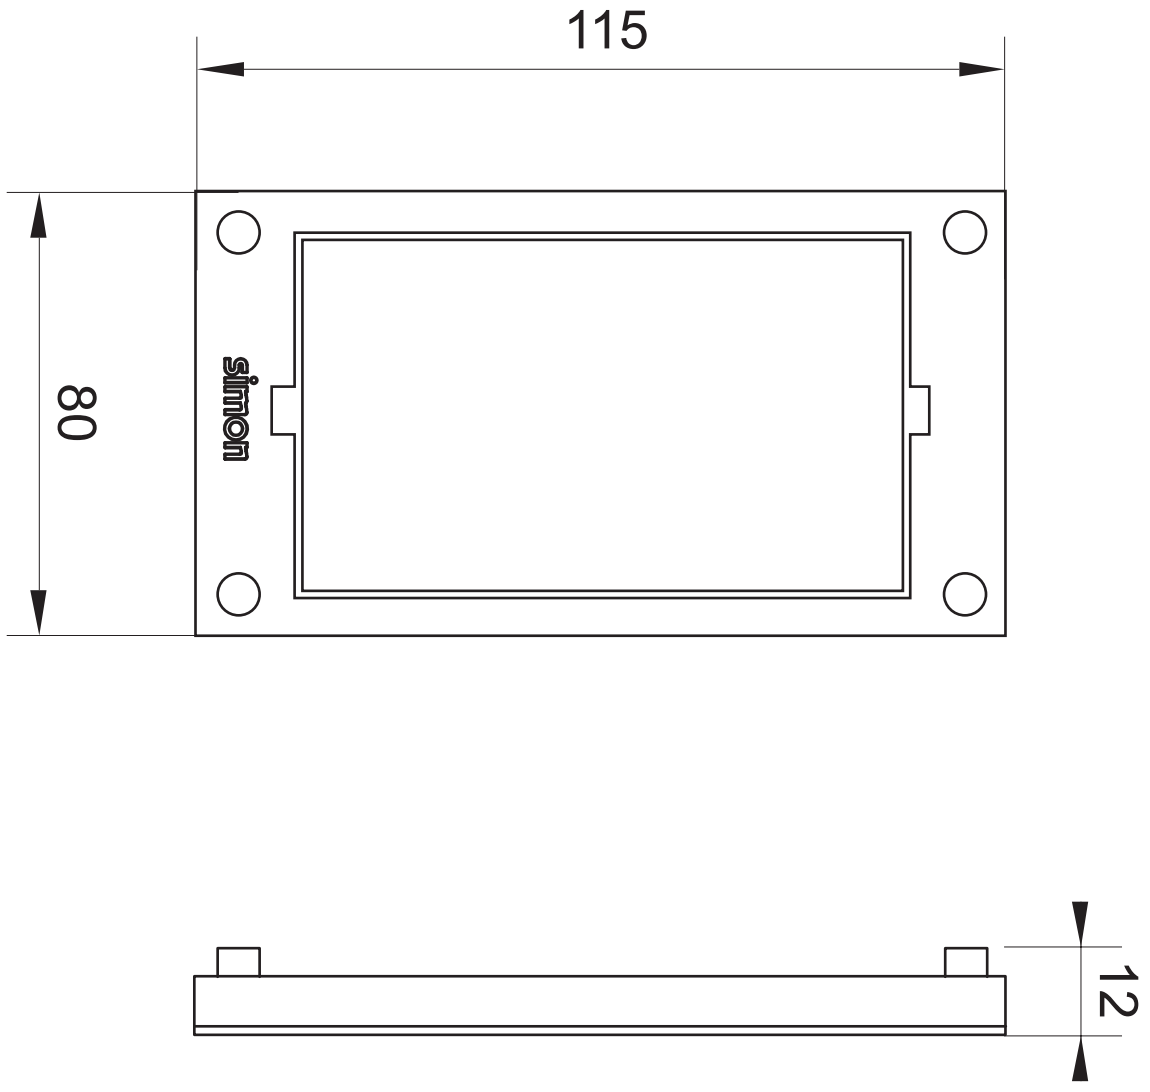
PACKAGING VOLUME
2871375

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.5

PACKAGING WEIGHT UNIT
KGM


115
80
simon
12