Cover for mechanism of the German double socket outlet with viewer graphite Simon 500 Cima

REF. **50011841-038**



BASIC INFORMATION

DESCRIPTION

Cover for Schuko double socket outlet red viewer, of the collection Simon 500 Cima. Socket and cover tandem form the perfect for the Schuko socket outlet with dual viewer, in an attractive red colour that combines with all types of rooms. Made of thermoplastic materials and self-extinguishing halogen-free, adding extra security as it avoids flame spread in case of fire and to minimize the toxicity by smoke. The innovation in the collection Simon 500 Cima, giving the cover for bipolar socket outlet, an exhaustive signaling function that, thanks to the technology of Simon, you can locate its socket, when lack of lighting. With a size of 100 x 50 x 9 mm and a depth of 9mm, it is suitable to install it on the surface-mounted or flush-mounted according to their needs specific. The collection Simon 500 Cima is elegance, innovation and security.

FINISH

Graphite

MATERIAL

Plastic

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for the mechanism of the German double socket outlet with viewer without LED light indicator

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT
Schuko

INDICATOR FUNCTION
Yes

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
2

RAL
7021

VERSION
2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.026

PRODUCT NET WEIGHT
0.026

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093597

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

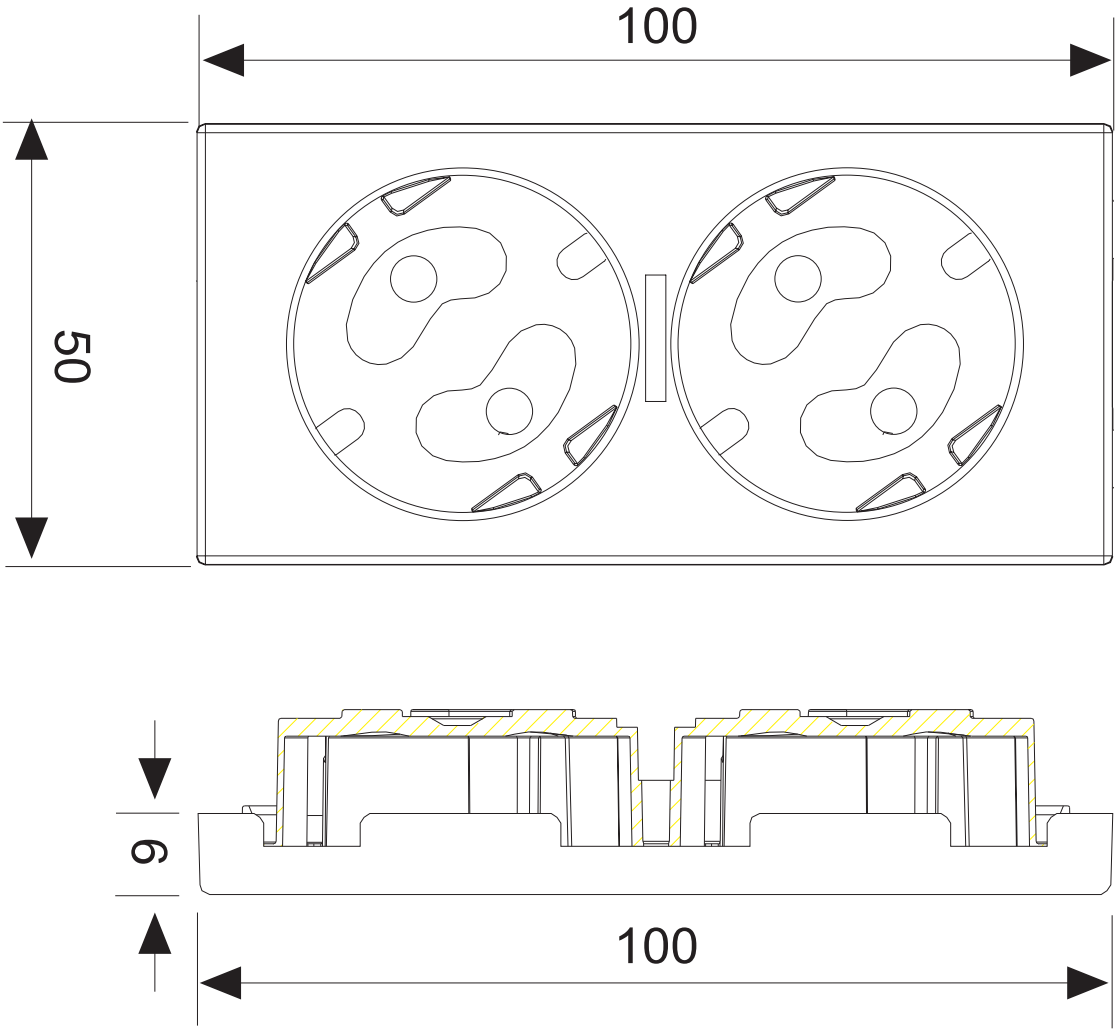
PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.26

PACKAGING WEIGHT UNIT
KGM


100
50
6
100