


Mechanism for creating 4 different lighting scenes

REF. 75326-39

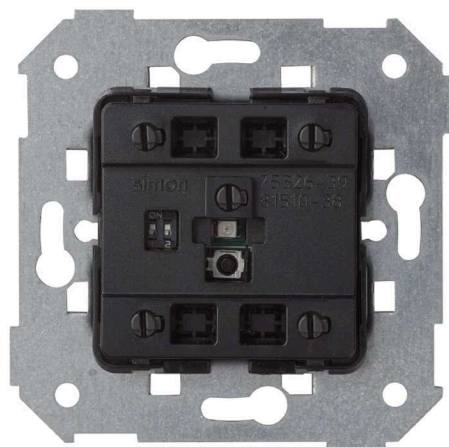

BASIC INFORMATION

DESCRIPTION

To each space a different lighting, thanks to the Simon 82 mechanism for creation of 4 different lighting scenarios, with switch of control of infrared. With screw terminal connection and suitable for installation, recessed or surface-mounted, it fits perfectly into any type of space, also, thanks to its simple design with minimalist lines and combination of colours and textures. Supports, in addition, a cable section of 1.5 to 2.5 mm with a stripped 10 mm. It is compatible with a power of 230 Volts, 50 Hz and electromagnetic transformers 500 VA. Consists of a total of 10 wires and 4 circuits to ensure a perfect adjustment of light intensity to adapt to each room. Composed of electrical materials isolated with halogen-free thermoplastic, it protects the room in case of fire, supporting a temperature range of installation from 0 to 40 ° C and a maximum 70 °C.

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

COMPATIBLE WITH MECHANICAL SWITCH

No

PACKAGING CONTENTS

Scene creator and instruction
sheet

REMARKS

Does not need programming.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

NUMBER OF CONTACTS

10

NUMBER OF CONTROLLABLE CIRCUITS

4

NUMBER OF POSSIBLE ELEMENTS

1 element

COMPATIBLE WITH FLUORESCENT LAMPS WITH 1-10V DIMMABLE ELECTRONIC BALLAST

No

COMPATIBLE WITH FLUORESCENT LAMPS (VA)

1200 VA Non-compensated

FREQUENCY

50 Hz

INDICATOR FUNCTION

No

IP RATING

IP20

COMPATIBLE WITH LOW CONSUMPTION (W)

No

TYPE OF MECHANISM

Push / IR

COMPATIBLE WITH MOTORS (VA)

No

OPERATING TEMPERATURE RANGE (°C)

0 - 40 °C

MODE OF OPERATION

4 lighting ambients

POWER SUPPLY (V~)

230 V~

VERSION

Single

NUMBER OF WIRES

10

INSTALLATION AND MAINTENANCE

BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

CABLE STRIPPING NECESSARY (MM)

10

CLAW

Included

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-2-1:2004 | EN 60669-2-1:2004 A1:2009 | EN 60669-2-1:2004 A12:2010 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053071038

PRODUCT NET WEIGHT

0.1

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053071038

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.1

UNITARY PACKAGING VOLUME

329232

PACKAGING HEIGHT

57

PACKAGING NET WEIGHT

0.1

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

76

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.1

PACKAGING LENGTH

76