MOOD 110 wall-mounted luminaire X-Less 3000 K

REF. **91621104-399**

BASIC INFORMATION

FINISH	PACKAGING CONTENTS
White	1 Unit
APPLICATION	**ETIM CLASS**
Domestic,Office,Retail,Hotel,Contract	EC002892

simon

TECHNICAL INFORMATION

FREQUENCY
50 - 60 Hz

IP RATING
IP20

OPERATING TEMPERATURE RANGE (ºC)
0 - 35 ºC

POWER SUPPLY (V~)
8 V~

COLOR TEMPERATURE (K)
3000 K

CRI
80

DIRECTIONAL
No

DRIVER INCLUDED
No

ELECTRICAL CLASS
III

ENERGY EFFICIENCY
A+

LIGHT BEAM APERTURE ANGLE (°)
112º

COLOR TYPE
NW

LIGHTING EFFICIENCY (LM/W)
hasta 60 lm/W

LUMENS (LM)
92 lm

NUMBER OF LUMINAIRES
1

MACADAM STEPS
<3 Step MacAdam

OPTICS
General 112º

POWER (W)
1.6 W

CHROMATICS CRI ICONS

CRI
80

PHOTOMETRY ASSETS – POLAR

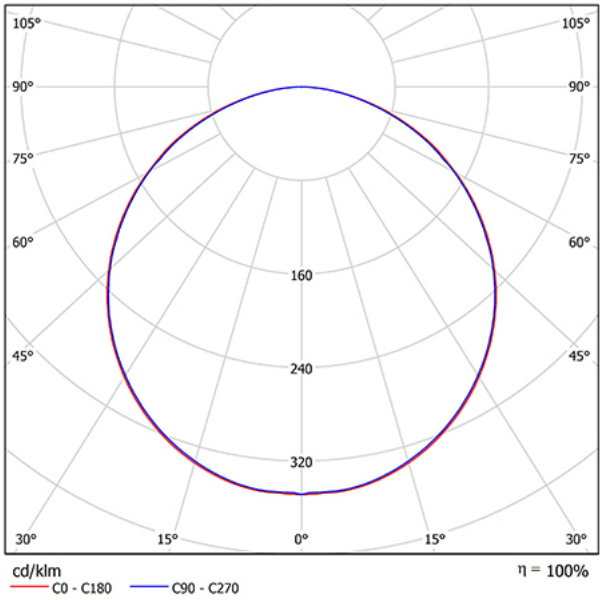

simon

INSTALLATION AND MAINTENANCE

INSTALLATION TYPE
Trimless

REGULATIONS

EAC MARKED
No

ECORRAE MARKED
Yes

WARRANTY
5 years

simon

LOGISTICS INFORMATION

UNITARY EAN CODE
8436547047116

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.18

PRODUCT NET WEIGHT
0.09

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8436547047116

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
115

PACKAGING WIDTH
130

PACKAGING LENGTH
60

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
897000

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.18

PACKAGING NET WEIGHT
0.09

PACKAGING WEIGHT UNIT
KGM