

ARCH Downlight Trimless Round 2700 K Spot White

REF. 91563001-200



BASIC INFORMATION

BODY MATERIAL

Die-cast aluminium

PACKAGING CONTENTS

1 Unit

ETIM CLASS

EC001744

APPLICATION

Domestic, Office, Retail, Hotel, Contract

PACKAGING DIMENSIONS (MM)

16x224x171 mm

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

DIRECTIONAL

Yes

LUMENS (LM)

800 lm

IP RATING

IP20 / IP43

DRIVER INCLUDED

No

NUMBER OF LUMINAIRES

1

OPERATING TEMPERATURE RANGE (°C)

0 - 35 °C

ELECTRICAL CLASS

II

MACADAM STEPS

<3 Step MacAdam

POWER SUPPLY (V~)

110/240 V~

ENERGY EFFICIENCY

A+

OPTICS

Spot 20°

RAL

9016

L70 (°C)

100000h at 25°C

PHOTOBIOLOGICAL CLASSIFICATION

Class II

L90 (°C)

30000h at 25°C

COLOR TEMPERATURE (K)

2700 K

POWER FACTOR (Φ)

> 0,9

CRI

90

COLOR TYPE

WW


POWER (W)

9 W

LIGHTING EFFICIENCY (LM/W)

111 lm/W

PHOTOMETRY ASSETS – POLAR

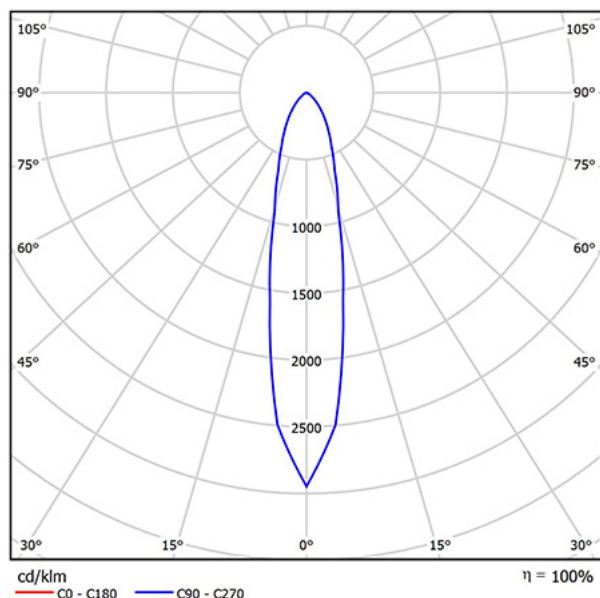

INSTALLATION AND MAINTENANCE

INSTALLATION ALTERNATIVES

Flush-mounted, Surface-mounted

INSTALLATION TYPE

Trimless

REGULATIONS

EAC MARKED

Yes

ECORRAE MARKED

No

WARRANTY

5 years

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WEIGHT
UNIT
KGM

PACKAGING MEASUREMENT
UNIT
MMT

UNITARY PACKAGING WIDTH
0

PACKAGING EAN
8436547035878

PACKAGING VOLUME
4528125

UNITARY PACKAGING LENGTH
0

UNITS CONTAINED PACKAGING
1

PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING VOLUME
0

PACKAGING HEIGHT
116

PACKAGING GROSS WEIGHT
0.99

UNITARY PACKAGING GROSS
WEIGHT
0.6

PACKAGING WIDTH
171

PACKAGING NET WEIGHT
0.9

PRODUCT NET WEIGHT
0.9

PACKAGING LENGTH
224

PACKAGING WEIGHT UNIT
KGM