


R-TV+Sat signal outlet, intermediate gold Simon 270

REF. 20000487-095

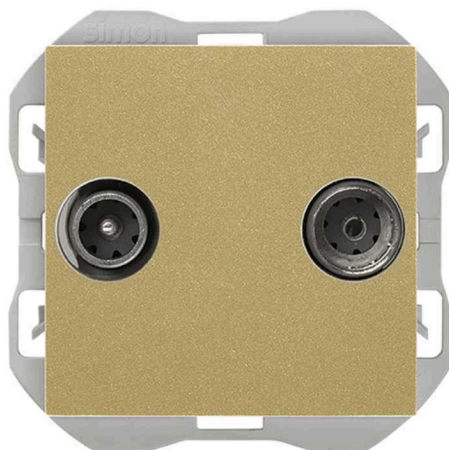

BASIC INFORMATION

DESCRIPTION

Intermediate R-TV+SAT signal outlet from the Simon 270 series, designed for cascade installations between the single outlet and the end outlet. FM/TV male and SAT female output connector, with IEC shielding and 75 Ω impedance. Made of thermoplastic, it measures 45 x 45 mm. Pass band from 47 to 862 MHz for R-TV and from 950 to 2150 MHz for SAT, with a tap attenuation greater than 25 dB. Suitable for flush mounting in a universal back box, in a horizontal position. Protection rating IP20. Operating temperature range: 5 to 45 °C. Storage temperature range: -25 to 50 °C. Clean with a soft cloth lightly dampened with soapy water, avoiding abrasive or chlorine-based cleaners. Up to 9 available finish colours: 090 Glossy White; 190 Matte White; 091 Copper; 093 Aluminium; 094 Champagne; 095 Gold; 096 Titanium; 097 Bronze; 098 Matte Black.

FINISH

Matt gold

COMPATIBILITY

Simon 270 frames

ETIM CLASS

EC000439

MATERIAL

Thermoplastic

PACKAGING CONTENTS

R-TV+SAT socket, cover and instruction sheet

TECHNICAL INFORMATION

AVAILABLE MARKET CE	FORMAT R/TV,SAT	STORAGE TEMPERATURE RANGE (°C) -25 - 50 °C
COMPATIBLE 12V AC/DC No	IP RATING IP20	TV INSERTION LOSS (MHZ) 3,5 dB
COMPATIBLE 230V AC/DC No	MAINTENANCE Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.	SAT INSERTION LOSS (MHZ) 5 dB
CABLE SECTION ADMITTED (MM) From 1,5 to 2,5 mm	TYPE OF MECHANISM Insertion	TV TAP LOSS (MHZ) 7,5 dB
CONNECTOR TYPE R/TV+SAT	OPERATING TEMPERATURE RANGE (°C) 5 - 45 °C	SAT TAP LOSS (MHZ) 9 dB
NUMBER OF POSSIBLE ELEMENTS 1 element	RAL 1036	TAP ATTENUATION (DB) >25 dB

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM) 8	INSTALLABLE IN FLUSH MOUNT JUNCTION BOX Universal	INSTALLATION TYPE Suitable for flush mounting
	INSTALLATION DIRECTION Horizontal, Vertical	TYPE OF TERMINAL CONNECTION - FUNCTION 1 Screw

REGULATIONS

REGULATIONS

Dir. 2014/30/UE EMC | Dir. 2011/65/UE RoHS + post. mod. | EN 50083-2:2012 + A1:2015 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053266205

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.088

PRODUCT NET WEIGHT

0.088

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053264928

UNITS CONTAINED PACKAGING

5

PACKAGING HEIGHT

55.5

PACKAGING WIDTH

58

PACKAGING LENGTH

280

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

901320

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0

PACKAGING NET WEIGHT


0.44

● INTERMEDIA
20000487-09


○ FINAL
20000488-09x

● UNICA
20000486-09x


En Serie/Cascada

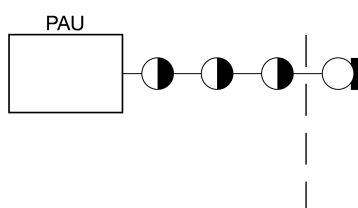


En Estrella




1

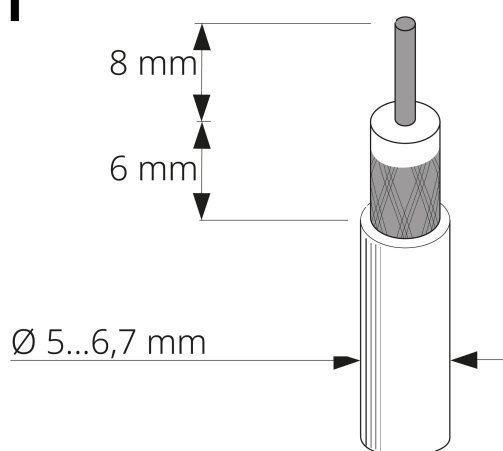


2

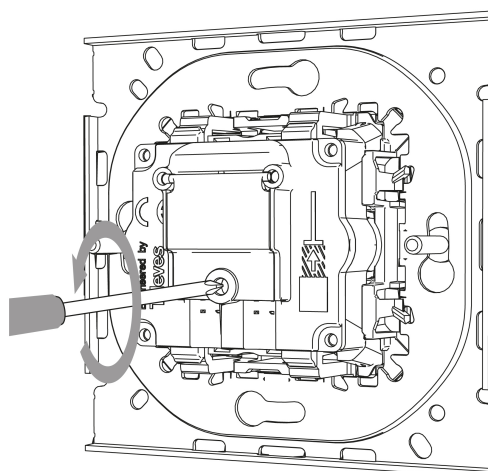

3

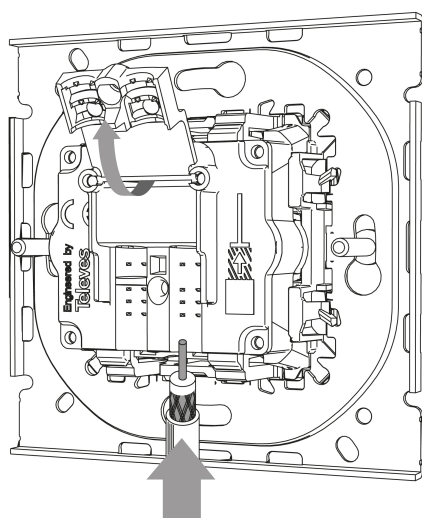

4

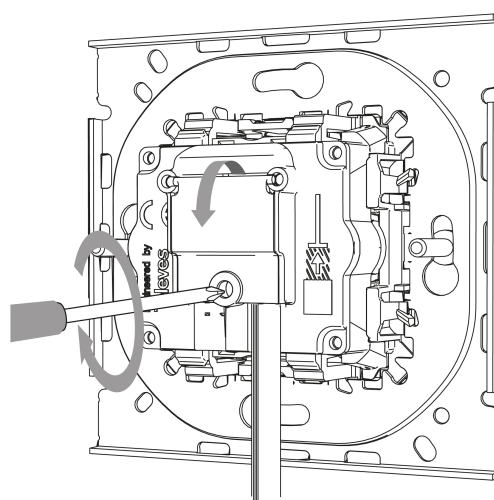

Para información más detallada consultar la hoja de instrucciones
For more detailed information check the instruction sheet