
Trim plate with combined electrical and voice and data/multimedia cable entry for 1 element black Simon K45

REF. **K20/14**

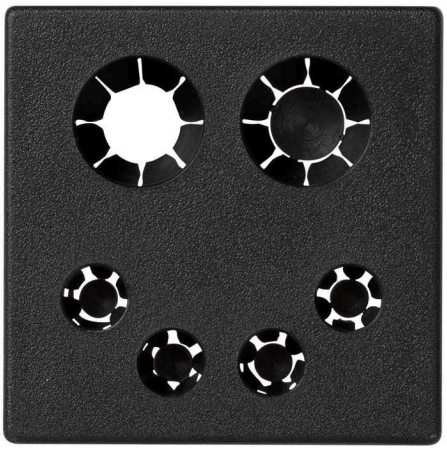

BASIC INFORMATION

DESCRIPTION

Trim plate with combined cabling input of electrical and voice and data / multimedia of 1 element, finished in black colour and belonging to the series Simon K45. This plate includes 2 pre-punched sections measuring 13 mm in diameter and 4 pre-punched sections measuring 6 mm DI diameter and these pre-punched holes sections include retainers to prevent the cabling from becoming disconnected when pulled from the other end of the installation. Its dimensions are 45 x 45 x 8.5 mm and its cleaning is quite simple, as you will only have to use a soft and dry cloth and never use abrasive cloths or cleaners containing chlorine. The series Simon K45 is perfect for connectivity in work stations. One of its elements is the most characteristic Teleblock that raises the connections to the highest level, thanks to its automatic elevation that adapts to any type of furniture.

FINISH

Black

MATERIAL

Plastic

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-038)

PACKAGING CONTENTS

Plate with combined electrical and voice and data/multimedia wiring entry

ETIM CLASS

EC000011

REMARKS

Includes 2 pre-punched sections measuring 13 mm in diameter (to insert 3x2.5mm leads) and 4 pre-punched sections measuring 6 mm in diameter (to insert voice/data and multimedia wiring). The pre-punched sections include retainers to prevent the cables from becoming disconnected when pulled from the other end of the installation.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Versions of plates that provide direct access to the wiring through 20x30 trunking and conduit or cable gland

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60° C

INDICATOR FUNCTION
No

IP RATING
IP20

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60° C

NUMBER OF MODULES
Half

RAL
7021

VERSION
Single

INSTALLATION AND MAINTENANCE

TYPE OF FASTENING
Fixing by direct snap-fit, no tools needed

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-038)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

REMOVAL OF THE PLATE
Only with tool

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-1:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0.3

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.01

PRODUCT NET WEIGHT
0.01

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436036680

UNITS CONTAINED PACKAGING
20

PACKAGING HEIGHT
70

PACKAGING WIDTH
93

PACKAGING LENGTH
140

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
911400

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.42

PACKAGING NET WEIGHT
0.2

PACKAGING WEIGHT UNIT
KGM