


Set of 2 push-button switches for blinds 10A 250V~ with electrical latching system ivory Simon 27 Play

REF. 27332-32

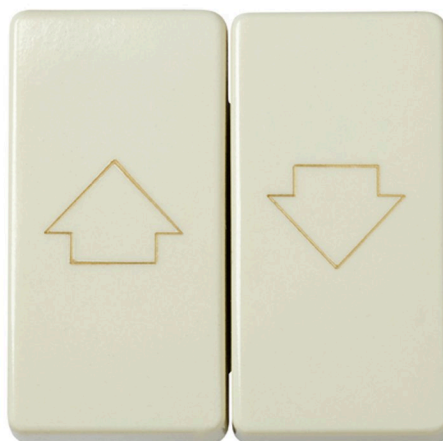

BASIC INFORMATION

DESCRIPTION

Controls the natural light in your room so intuitive and customized to each space with the group of 2 push buttons for blinds of Simon 27 Play. With finishes in ivory and engraving of the up / down blinds, makes this set of push buttons option is ideal for spaces where the innovation and functional lighting earn prominence. With a size of 45 x45 mm, it consists of two modules with tilting system integrated, and is compatible with a power of 250 Volts and intensity of 10 Amps and a cable section cross-section of up to 2.5 mm and stripping of 11 mm It is made of metal materials with halogen-free thermoplastic isolated, and thermoset trim for greater security in case of fire, to prevent the flame spread and toxicity by smoke. Designed for installation, recessed or surface-mounted, it is equipped with latching of security, to prevent the simultaneous actuation

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rockers

ETIM CLASS

EC000044

REMARKS

Mechanism fitted with security latching to prevent simultaneous operation.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LATCH TYPE

Electric

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Double

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

CURRENT (A)

10 A

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

TYPE OF TERMINAL

CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.053

PACKAGING MEASUREMENT

UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT

UNIT

KGM

PACKAGING VOLUME

0.895

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053071717

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING VOLUME

895125

UNITS CONTAINED PACKAGING

5

PACKAGING GROSS WEIGHT

0.265

UNITARY PACKAGING VOLUME

UNIT

MMQ

PACKAGING HEIGHT

155

PACKAGING NET WEIGHT

0.265

UNITARY PACKAGING GROSS
WEIGHT

0.053

PACKAGING WIDTH

55

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

105