


**Floor trunking entry baseboard 1 side 85x18 mm for
securing plastic mini tower with 2 sides white Simon 500
Cima**

REF. 52554204-030

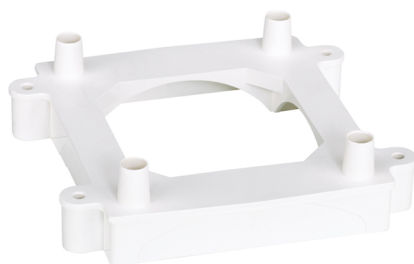

BASIC INFORMATION

DESCRIPTION

Give your work area the most functional and elegant finishes with the baseboard trunking entry of the collection Simon 500 Cima in white tone. With 1 side of 85 x 18 millimetres for fastening of mini-tower plastic 2 sides, this baseboard provides the finish, ideal to complete the installation of the Simon 500 Cima mini-tower. Manufactured with thermoplastic materials halogen-free, prevents the flame spread and toxicity by smoke in case of fire; by adding extra security to the set as it reaches a temperature range of installation of -5°C to 60 ° C, being able to they cannot be exceeded in construction. With a compact design, the wide range of possibilities aesthetics that gives it the tone white, and its functionality in the minimum space, the Simon 500 Cima baseboard, becomes the perfect finish for the fastening of the mini-tower in the work area.

FINISH

White

PACKAGING CONTENTS

Floor trunking entry baseboard

MATERIAL

Plastic

ETIM CLASS

EC002454

REMARKS

Integrates the mini tower into the 85x18 mm floor trunking

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

2 sides

INSULATION RESISTANCE (V-MΩ)

>5MΩ at 500V

RAL

9003

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

VERSION

2 sides

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING

By direct snap-fit into the 85x18 mm 1 side floor trunking (tool-free fitting)

INSTALLATION DIRECTION

Horizontal

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 50085-2-4:2009

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101988

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053101988

PACKAGING VOLUME

2.116

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

65

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

155

PACKAGING NET WEIGHT

0.145

UNITARY PACKAGING GROSS WEIGHT

0.145

PACKAGING LENGTH


210

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.145

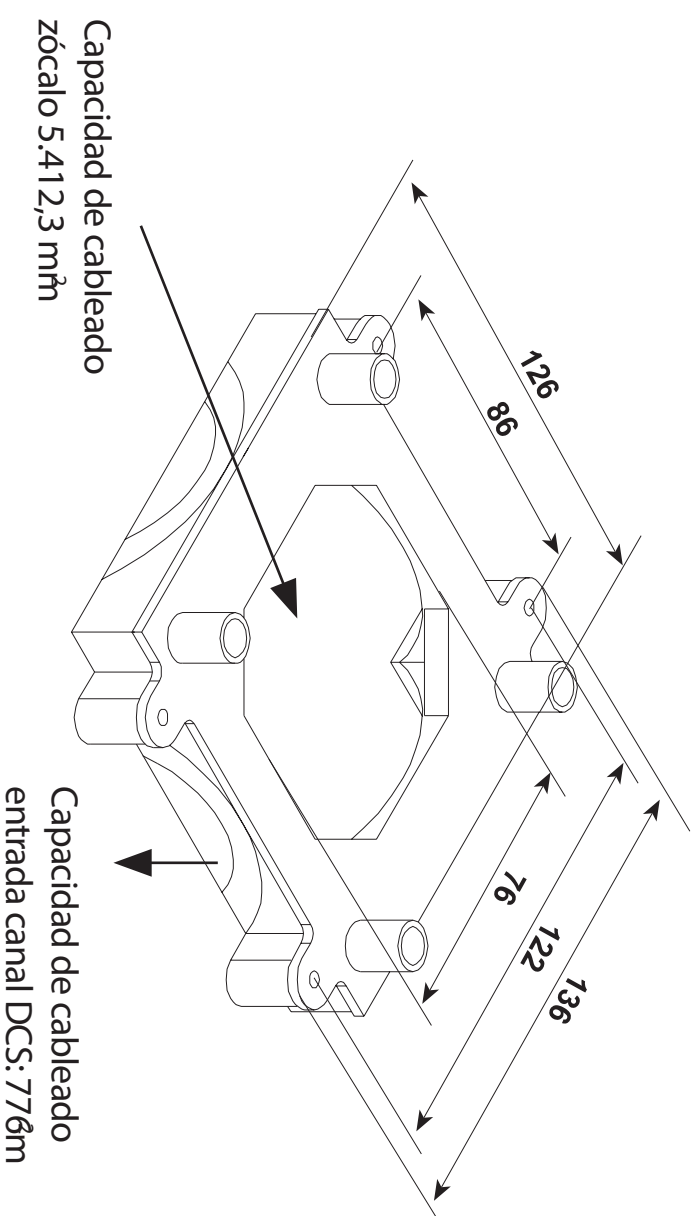

Zócalo con pretroquel preparado para canal de suelo DCS 85x18mm