

Push-button switch with bell symbol 10A 250V~ for half element and fast terminal connection system ivory Simon 27 Play

REF. 27150-61



BASIC INFORMATION

DESCRIPTION

A design with sober lines and finishes in a discreet and stylish ivory colour, it is converted into the perfect balance for the push-button switch with bell engraving of the Simon 27 Play collection. The dynamics and originality of its design, together with the functionality and innovation, make the push-button switch Simon 27 Play the ideal for modern style to clean and functional. Designed for half an element, it consists of a module with a size 22.5 x 45 mm, with rocker operation that, together with its quick terminal connection and its installation is suitable for recessed or surface-mounted, maximize the functionalities adapting to the needs of each room. Supports power of 250 Volt voltage and a maximum load of 10 Amps, with a cross-cable section from 1.5 to 2.5 mm This composed of halogen-free thermoplastic and thermoset trim, which protects the room in case of fire, avoiding the flame spread and smoke poison.

FINISH

Ivory

MATERIAL

Thermoplastic

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC000029

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

NUMBER OF POSSIBLE ELEMENTS

Half element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

VERSION

Single

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American, Small spaces and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLATION DIRECTION

Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251560

UNITARY PACKAGING HEIGHT

22.5

UNITARY PACKAGING WIDTH

38.5

UNITARY PACKAGING LENGTH

45.5

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.039

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.023

PRODUCT NET WEIGHT

0.019

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035580

UNITS CONTAINED PACKAGING

20

PACKAGING HEIGHT

53

PACKAGING WIDTH

160

PACKAGING LENGTH

220

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1.866

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.462

PACKAGING NET WEIGHT


0.38

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

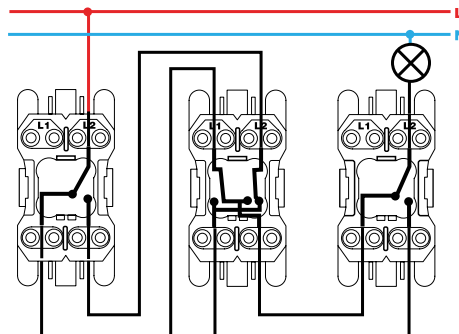


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

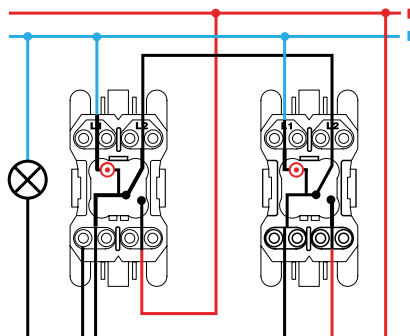


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

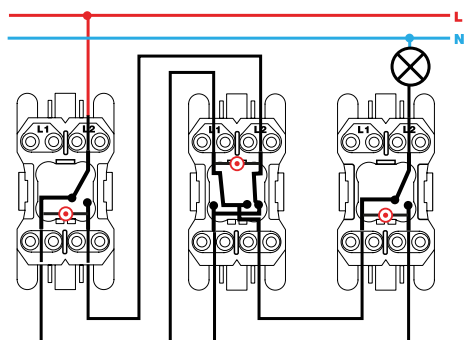

Conmutador cruce / Intermediate switch
XX2700254-XX