


Flat voice and data plate with dust cover for 1 element with 1 RJ45 category 6 FTP aluminium Simon 500 Cima

REF. 50003085-033

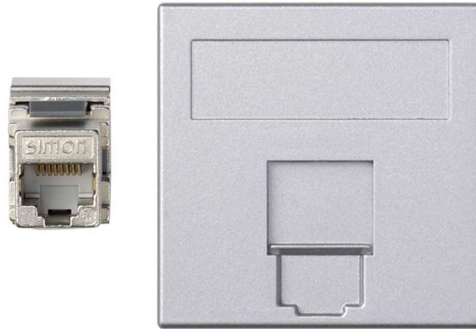

BASIC INFORMATION

DESCRIPTION

The plate of voice and data flat plate with dust cover for 1 element and 1 RJ45 category 6 FTP, of the Simon 500 Cima range, it is the perfect solution to give the maximum functionality and innovation to its working area. With the simplicity and elegance of avant-garde finishes in Aluminium, the flat base plate 500 Cima, offers speed in data transmission and security in case of fire, as it is manufactured with thermoplastic materials self-extinguishing halogen-free that prevent the flame spread and reduce the toxicity by smoke. Includes clips for fastening in vertical and horizontal enclosures without the need of adapters, making the installation process and ensuring maximum versatility of the product to suit the needs of each space aesthetic and functional. Compatible with Keystone and cabling ports 22-26 AWG, the flat base plate Simon 500 Cima in Aluminium, is versatility, innovation and functionality of the highest level.

FINISH

Aluminium

PACKAGING CONTENTS

Flat voice and data plate with dust cover, category 6 FTP RJ45 connector and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

Yes

PLATE TYPE

Flat

CABLE SECTION ADMITTED (MM)

22-26 AWG wiring

FORMAT

RJ45

RJ45 ADAPTOR MODULE

Included in voice and data plate

RJ45 CONNECTION

Without insertion tool

IP RATING

IP20

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

CONNECTOR CHARACTERISTICS

category 6 FTP

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

NUMBER OF CONNECTORS

1

VERSION

Single

RJ45 CONNECTORS

Included in voice and data plate

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

NUMBER OF MODULES

1

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053098035

PACKAGING VOLUME

0.052

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

20

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS
WEIGHT

0.037

PACKAGING WIDTH

224

PACKAGING NET WEIGHT

0.74

PRODUCT NET WEIGHT

0.037

PACKAGING LENGTH

290

PACKAGING WEIGHT UNIT

KGM

