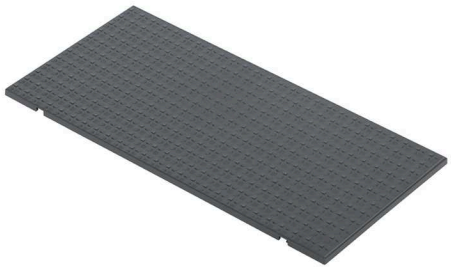
Flush-mount trim cover for adjustable floor box or service cover 8 elements grey Simon 500 Cima

REF. **52053104-035**



BASIC INFORMATION

DESCRIPTION

Within the series of adjustable floor boxes, Simon 500 Cima, gives the option of complete the installation by adding the Flush-mount trim cover or Service cover for 8 elements, both in a discreet but stylish tone Grey. This cover for Simon 500 Cima grey, it protects the 8 elements of the ingress of dust or other object, at the same time that provides both the access to the indoor of the installation, as the passage of cabling from the raised floor to the surface-mounted. Guaranteeing a total integration with the environment, the trim cover or register Simon 500 Cima, it is compatible with the current voice and data connectors on the market, is a guarantee of security thanks to its manufacturing in halogen-free thermoplastic material and resists overload and temperature changes. Innovation, security and elegance to your home, office or office, thanks to the collection Simon 500 Cima.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
2, 4, 6, 8 and 12 elements

DIELECTRIC STRENGTH
No holes or contours, with 2000V at 50 Hz for 1 minute

MAX TEMP DURING CONSTRUCTION WORK (ºC)
+90 ºC

HEAT RESISTANCE (ºC)
+125ºC (according rule IEC 60695-10-2)

IK CLASSIFICATION
08

INSULATION RESISTANCE (V-MΩ)
>5 MOhms at 500V

IP RATING
IP4X

KIT AVAILABILITY
No

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (ºC)
-5 to 60 ºC

NUMBER OF MODULES
8 modules

RAL
7011

VERSION
8 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

EXTINGUISHING (ºC)
+850 ºC / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

TYPE OF FASTENING
Using the screws supplied

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
In raised or concrete floor with adjustable floor boxes or service covers

REGULATIONS

REGULATIONS
Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053254882

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.134

PRODUCT NET WEIGHT
0.134

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053101544

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
75

PACKAGING WIDTH
165

PACKAGING LENGTH
290

PACKAGING MEASUREMENT UNIT
MMT

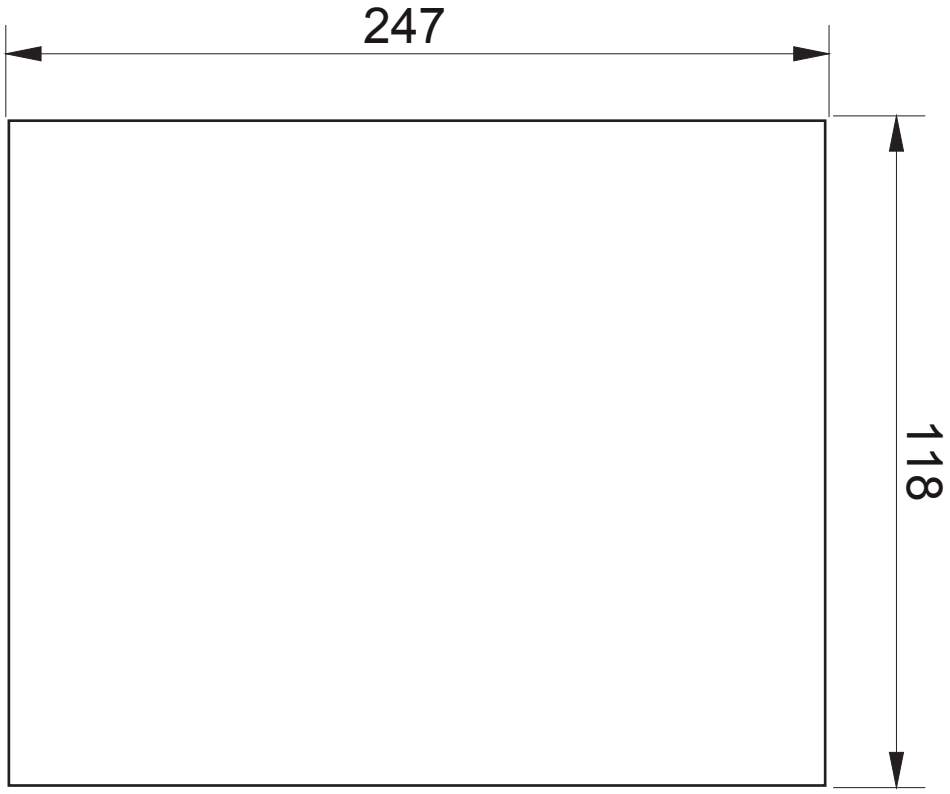
PACKAGING VOLUME
3.525

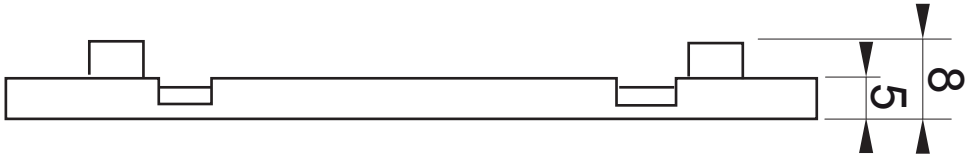
PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
1.34

PACKAGING WEIGHT UNIT
KGM


247
118


8
5