


Group of 2 intermediate switches 10AX 250V~ with quick terminal connection system Simon 75

REF. 7502251-039

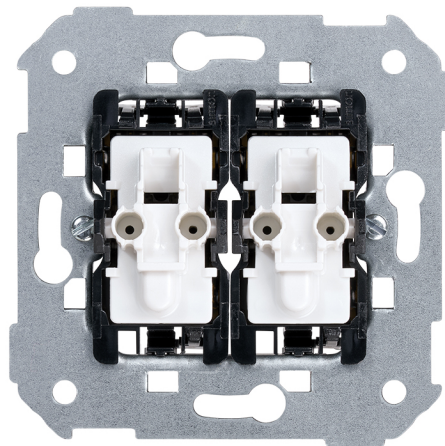

BASIC INFORMATION

DESCRIPTION

The group of 2 intermediate switches 10 AX 250 V~ Series Simon 360 is a double mechanism designed for lighting control from three or more points, suitable for hallways, staircases, hotels, offices, and frequently trafficked areas. It allows for the expansion of installations with switches and intermediate switches, ensuring safe and reliable operation. This double intermediate switch 10AX 250V incorporates a quick terminal connection system, which facilitates agile installation and reduces assembly time in new construction or renovations. It accepts conductors from 1.5 to 2.5 mm² and is prepared for flush-mounted or surface installation in a universal box. Manufactured in compliance with the EN 60669-1 standard and the European directives LVD and RoHS, it offers electrical stability, mechanical resistance, and adequate thermal behavior within an operating range of 5 to 40 °C. It has an IP20 protection rating for indoor use. Aesthetically and mechanically compatible with the Series Simon 360 and associated ranges, it allows the replacement of the rocker finish to adapt to different decorative environments. It is an appropriate solution for installations requiring a double intermediate switch 10AX with quick connection and high compatibility in lighting control systems.

MATERIAL

Plastic,Metal

COMPATIBILITY

Marcos Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING CONTENTS

Mechanism

ETIM CLASS

EC001590

REMARKS

Possibility of substituting the finish of the rocker supplied with a different one. 6 additional finishes available.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

RECESS DIMENSION (MM)

35

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

LINKABLE

No

STORAGE TEMPERATURE RANGE

(°C)

-20 - 75 °C

NUMBER OF CONTACTS

8

TYPE OF MECHANISM

Press

VERSION

Double

NUMBER OF POSSIBLE ELEMENTS

1 element

MONOBLOCK

No

VOLTAGE (V~)

250 V~

FREQUENCY

50 Hz

NOMINAL VOLTAGE (V~)

250 V~

NUMBER OF WIRES

8

INDICATOR FUNCTION

No

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CURRENT (A)

10 AX

POWER SUPPLY (V~)

230 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

REMOVAL OF COVER

Only with tool

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053091449

PACKAGING VOLUME

3017190

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

82

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.078

PACKAGING WIDTH

165

PACKAGING NET WEIGHT

0.78

PRODUCT NET WEIGHT

0.078

PACKAGING LENGTH

223

PACKAGING WEIGHT UNIT

KGM

