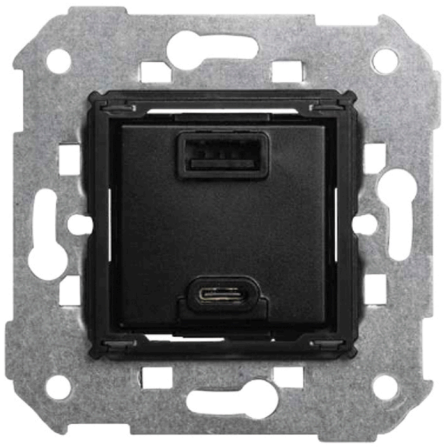
USB double A+C charger 30W Power Delivery Simon 75

REF. **7511296-039**



BASIC INFORMATION

DESCRIPTION

The double USB A+C 30W Power Delivery charger Simon 75 is the ideal solution for integrating fast USB charging in residential and tertiary electrical installations. Designed as a flush-mounted single element mechanism, it allows simultaneous charging of mobile devices, smartphones, tablets, and electronic equipment through a USB type A port and a USB type C port with Power Delivery (PD) technology. This flush-mounted USB charger works with a power supply of 127/230 V~ 50-60 Hz and provides a total power of up to 30 W, with output voltages of 5, 9, 12, 15, and 20 Vdc and a maximum current of up to 3.1 A according to the charging profile. It is compatible with Android and iOS devices and optimizes charging time thanks to intelligent power management. Its terminal connection system with screw terminals ensures a safe and professional installation, accommodating conductors from 1.5 to 2.5 mm^2. With an IP20 protection rating and compliance with LVD, EMC, RoHS, and EN 62368-1 standards, it offers electrical safety and long-term reliability. The USB A+C 30W charger Simon 75 is perfect for homes, offices, hotels, and commercial spaces that require an integrated fast charging USB socket, combining design and energy efficiency.

MATERIAL

Plastic,Metal

COMPATIBILITY

Simon 82 Detail, Simon 82 Nature, Simon 82 Concept and Simon 82.

PACKAGING

Bulk

ETIM CLASS

EC002949

REMARKS

These USB C sockets require devices compatible with PD.

TECHNICAL INFORMATION

NUMBER OF CONNECTORS
2

CONNECTOR TYPE
USB A + USB C

FORMAT
USB A + USB C

FREQUENCY
50 - 60 Hz

INDICATOR FUNCTION
No

IP RATING
IP20

LINKABLE
Yes

MAXIMUM POWER (W)
30

MONOBLOCK
Yes

PLATE TYPE
Flat

POWER SUPPLY (V~)
127/230 V~

RECESS DIMENSION (MM)
40

USB CHARACTERISTICS
USB A+C= 5,0 VDC 3,0 A 15W ; USB A= 5,0 VDC 3,0 A 15W / 9,0 VDC 3,0 A 27W / 12,0 VDC 2,5 A 30W ; USB C= 5,0 VDC 3,0 A 15W / 9,0 VDC 3,0 A 27W / 12,0 VDC 2,5 A 30W / 15,0 VDC 2,0 A 30W / 20,0 VDC 1,5 A 30W

USB CURRENT (A)
3.0 A

USB PORT TYPE
A,C

POWER DELIVERY USB
Yes

QUICK CHARGE USB
Yes

USB VOLTAGE (V~)
5/20 V~

VOLTAGE (V~)
127/230 V~

NUMBER OF WIRES
2

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
8

CLAW
Simon 27

REMOVAL OF COVER
Only with tool

INSTALLATION DIRECTION
Horizontal, Vertical

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Screw

TYPE OF TERMINAL CONNECTION - FUNCTION 2
USB: Screw

REGULATIONS

WARRANTY
3 years

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053284278

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.097

PRODUCT NET WEIGHT
0.097

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053284278

UNITS CONTAINED PACKAGING
1

PACKAGING HEIGHT
57

PACKAGING WIDTH
76

PACKAGING LENGTH
76

PACKAGING MEASUREMENT UNIT
MMT

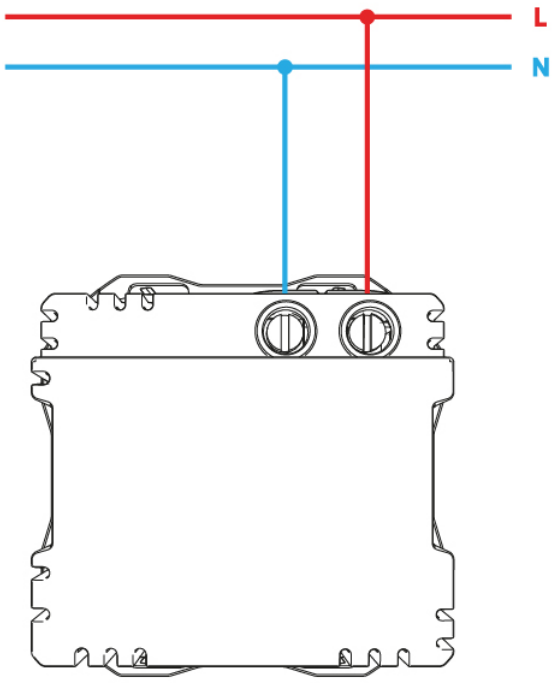
PACKAGING VOLUME
329232

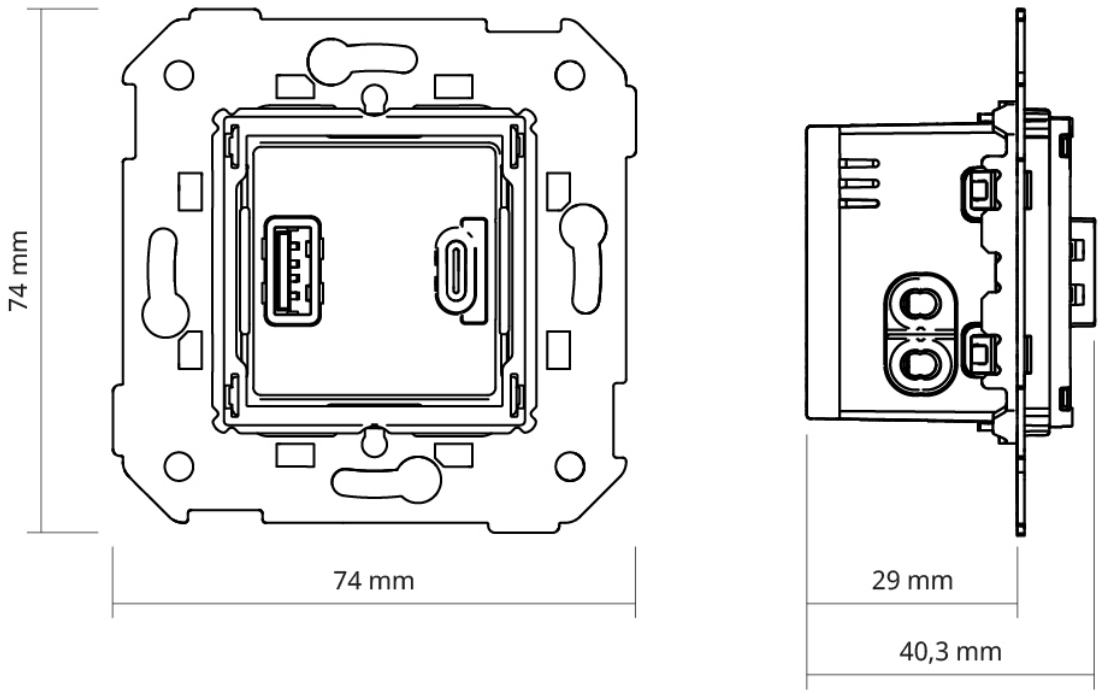
PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.097

PACKAGING WEIGHT UNIT
KGM


L
N


74 mm
74 mm
29 mm
40,3 mm