


Notification selector 9 zones for 1-trunking sound centre

REF. 05242-39

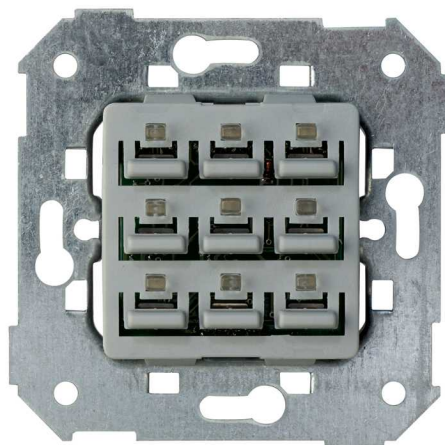

BASIC INFORMATION

COMPATIBILITY

Simon 75, Simon 82 Detail,
Simon 82 Nature and Simon 82
frames

PACKAGING CONTENTS

Control and instruction sheet

ETIM CLASS

EC002484

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CABLE SECTION ADMITTED (MM)

From 0,25 to 0,75 mm

TYPE OF MECHANISM

Push

VERSION

Single

NUMBER OF CONTACTS

4

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

NUMBER OF WIRES

4

NUMBER OF POSSIBLE ELEMENTS

1 element

POWER SUPPLY (V~)

12 Vdc

INDICATOR FUNCTION

Yes

REAR INPUT VIA TERMINALS

Yes

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

7

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

INSTALLATION TYPE

Suitable for surface and flush mounting

CLAW

Not possible

REGULATIONS

REGULATIONS

UNE-EN 60065:2003 + UNE-EN 55013:2002 + A1:2004 + UNE-EN 61000-3-2:2006 + UNE-EN 55022:2000 + UNE-EN 61000-4-3:2003 + A1:2004 + UNE-EN 61000-4-4:2005 + UNE-EN 61000-4-11:2005

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.07

PACKAGING MEASUREMENT
UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT
UNIT

KGM

PACKAGING VOLUME

337500

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053059173

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.075

UNITARY PACKAGING VOLUME
UNIT

MMQ

PACKAGING HEIGHT

60

PACKAGING NET WEIGHT

0.07

UNITARY PACKAGING GROSS
WEIGHT

0.07

PACKAGING WIDTH

75

PACKAGING WEIGHT UNIT

KGM

PACKAGING LENGTH

75