2-way switch 10AX 250V~ with built-in light indicator and fast terminal connection system grey Simon 27 Play

REF. **27204-67**



BASIC INFORMATION

DESCRIPTION

This control mechanism is used for skew the address or interrupt the current electrical circuit and allows you to control a lighting point from two different controls. It is a 2-way switch with quick terminal connection of the series Simón7 Play that is presented in a beautiful and original colour grey. The 2-way switch is suitable for 10A of intensity and 250 volts and indicator light has a built-in, which can be replaced if it is combined with Simon product with reference 2700802-064. Its rocker operation is very interactive and user-friendly, it measures 22.5 x 45 millimetres and consists of one module. Its installation system is by flush mounting or surface mounting. It is made of metal components with halogen-free thermoplastic insulation and thermoset trim, which contributes to the safety of the end product, ensuring good operation under very high or low temperatures. To clean it, it is only necessary to use a dry and soft any other type of product chemical it even could damage it.

FINISH

Grey

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)

0.55 mA

NUMBER OF POSSIBLE ELEMENTS

1 element

INDICATOR FUNCTION

Yes

CURRENT (A)

10 AX

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Pivoting

NOMINAL VOLTAGE (V~)

250 V~

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD|Dir. 2011/65/UE RoHS + post. mod.|EN 60669-1:2018|EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251843

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
1229865

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.033

PRODUCT NET WEIGHT
0.033

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053071434

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
105

PACKAGING LENGTH
221

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.23

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.33

PACKAGING NET WEIGHT
0.33


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

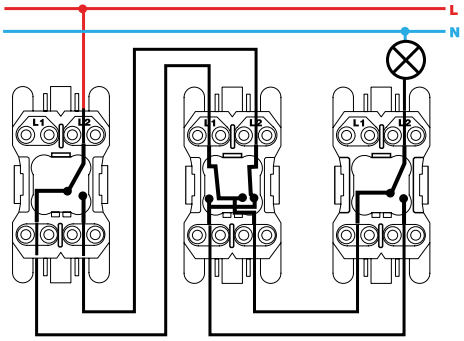


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

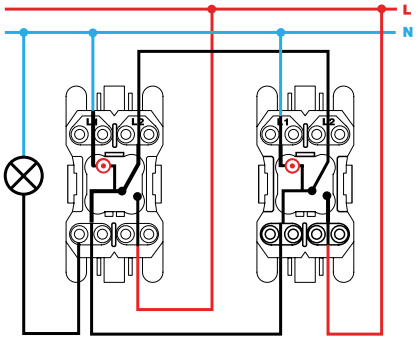


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

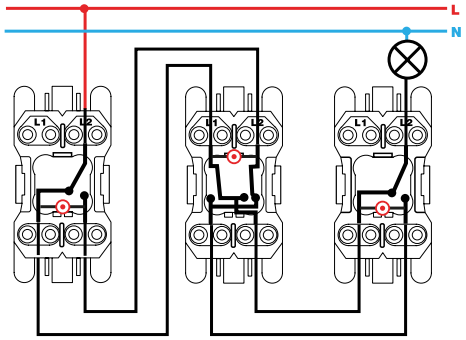

Conmutador cruce / Intermediate switch
XX2700254-XX