Single-pole switch 10AX 250V~ with built-in light indicator and fast terminal connection system white Simon 27 Play

REF. **27104-65**



BASIC INFORMATION

DESCRIPTION

The control mechanisms of the Simon 27 Play series are the most sold in the sector of electrical and electronic systems thanks to its great relationship between quality and price. One of them is the single-pole switch of 10 AX current and 250V~ voltage in white finish, an element with incorporated light and quick terminal connection system. This switch, whose dimensions are 45x45 mm, has a cable section from 1.5 to 2.5 mm and wire stripping of 11 mm. Can be combined with article 2700802-064 in case of replacement of the indicator light, its convenient and quick installation, which can be enhanced both on the surface-mounted and flush-mounted in the wall, is another of its advantages. Also its resistance to knocks and scratches, a quality that is obtained from the metal components with halogen-free thermoplastic insulation and thermo-stable trim with which it has been manufactured.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

ETIM CLASS

EC001590

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
From 1,5 to 2,5 mm

CONSUMPTION INDICATOR (MA)
0.55 mA

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
Yes

CURRENT (A)
10 AX

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Pivoting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

VERSION
Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

CLAW
Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, American and Centralisations

INSTALLATION DIRECTION
Horizontal, Vertical

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Fast

REGULATIONS

REGULATIONS
Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE
8421053251515

UNITARY PACKAGING HEIGHT
45.5

UNITARY PACKAGING WIDTH
38.1

UNITARY PACKAGING LENGTH
45.5

UNITARY PACKAGING MEASUREMENT UNIT
MMT

UNITARY PACKAGING VOLUME
0.079

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.033

PRODUCT NET WEIGHT
0.033

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053035733

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
53

PACKAGING WIDTH
160

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1.866

PACKAGING VOLUME UNIT
DMQ


PACKAGING GROSS WEIGHT
0.315

PACKAGING NET WEIGHT
0.33


PACKAGING WEIGHT UNIT
KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interruptor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interruptor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

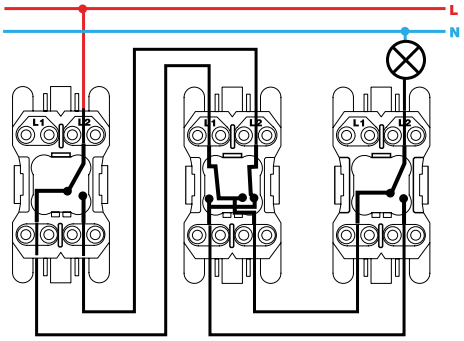


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches



Interruptor unipolar / Single-pole switch
XX00102-XX




Interruptor bipolar / Double pole switch
XX00134-XX

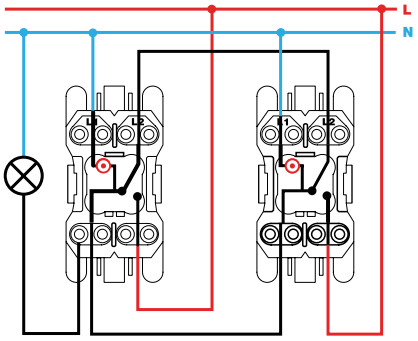


Conmutador / 2-way switch
XX00202-XX


Mecanismos con luminoso / Switches with light




Interruptor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

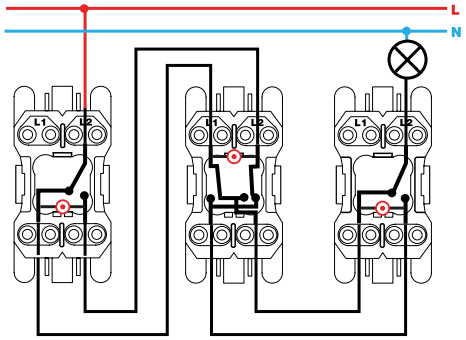

Conmutador cruce / Intermediate switch
XX2700254-XX