Cover for German double socket outlet mechanism with viewer and LED indicator orange Simon 500 Cima

REF. **50011041-072**



BASIC INFORMATION

DESCRIPTION

Cover for the mechanism of socket Simon 500 Cima. It is Schuko, is available in orange colour and with dual viewer and indicator led. With 2 elements and 2 modules, this cover for plugs of the Simon 500 Cima series, needs to be combined with a double socket outlet and that has Schuko format. Complies with the regulations UNE 20315 standard / EN 60.998-2-3 and is made of halogen-free thermoplastic, a material that ensures a low toxicity in case of smoke and the no-propagation spread in case of fire. It is a cover socket suitable for both recessed and on surfaces with temperatures between -5 and 60 ° C and its cleaning is simple: Just you would have to use a soft, dry cloth and avoid abrasive cloths or cleaners that contain a percentage of chlorine in its formula.

FINISH

Orange

MATERIAL

Various

COMPATIBILITY

German double socket outlets Simon 500 Cima

PACKAGING CONTENTS

Cover for German double socket outlet mechanism with viewer and LED light indicator and installation manual

ETIM CLASS

EC000011

REMARKS

Must be combined with a German double socket outlet

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

AVAILABLE IN
Plate with viewer and LED light indicator, plate without viewer and as a replacement for plate with viewer

MAX TEMP DURING CONSTRUCTION WORK (°C)
+60 °C in surface-mount wall installation and +90 °C in flush-mount wall installation

FORMAT
Schuko

INDICATOR FUNCTION
Yes

IP RATING
IP20

KIT AVAILABILITY
No

LED CONSUMPTION INDICATOR (MA)
0.55

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TEMPERATURE RANGE DURING INSTALLATION (°C)
-5 to 60 °C

NUMBER OF MODULES
2

RAL
2009

VERSION
2 elements

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER
Only with tool

TYPE OF FASTENING
By direct snap-fit on the double socket outlet (no tools needed for fastening))

INSTALLATION DIRECTION
Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface or flush-mount installation

REGULATIONS

REGULATIONS
Dir. 2011/65/UE RoHS + post. mod.|EN IEC 63000:2018|IEC 60884-1 Ed. 3.2|UNE 20315-1-1:2017|UNE 20315-1-2:2017|DS 60884-2-D1:2023

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
0

UNITARY PACKAGING GROSS WEIGHT
0.028

PRODUCT NET WEIGHT
0.028

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8421053093566

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
52

PACKAGING WIDTH
105

PACKAGING LENGTH
220

PACKAGING MEASUREMENT UNIT
MMT

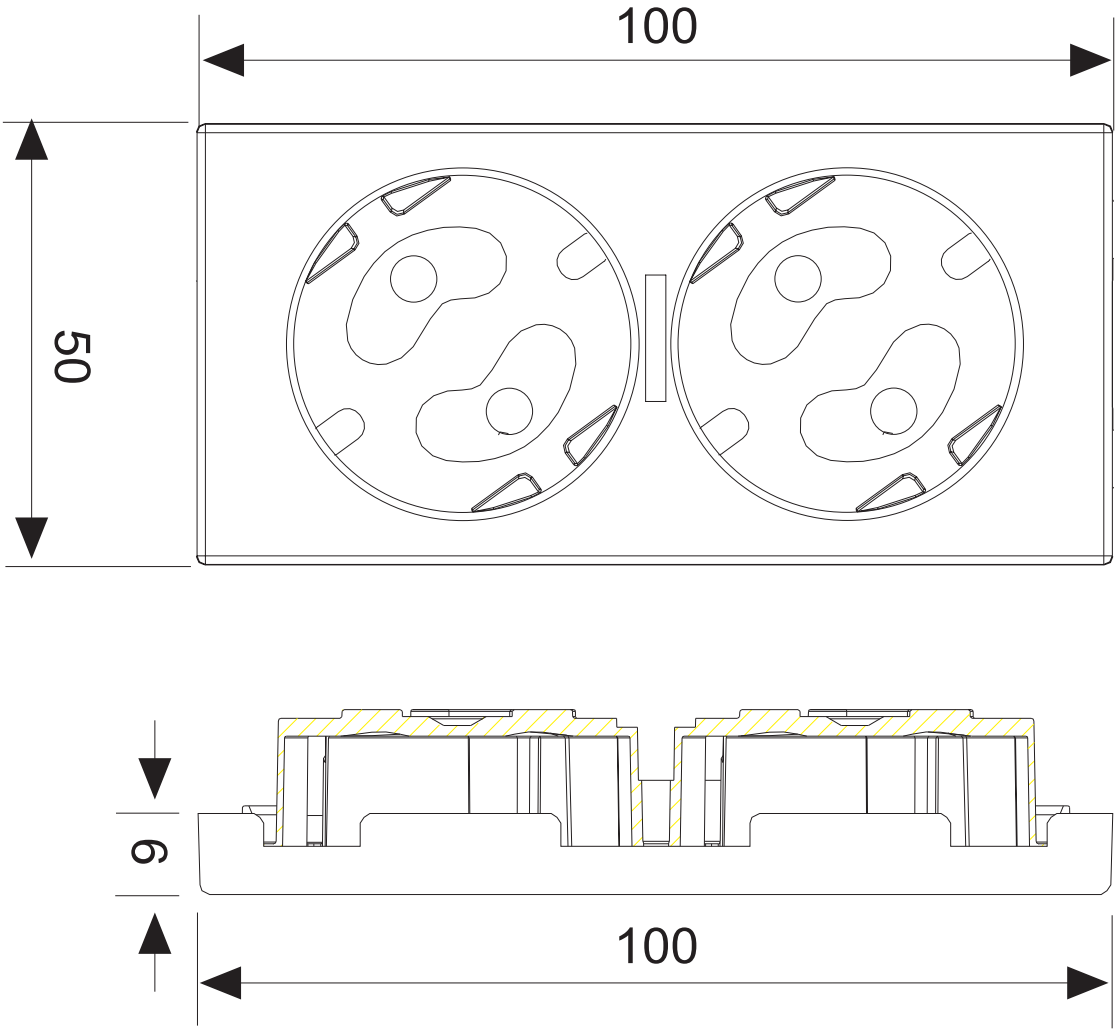
PACKAGING VOLUME
1.201

PACKAGING VOLUME UNIT
DMQ

PACKAGING GROSS WEIGHT
0

PACKAGING NET WEIGHT
0.28

PACKAGING WEIGHT UNIT
KGM


100
50
6
100