


Flush-mount trim cover square shallow floor box for 4 elements grey Simon 500 Cima

REF. 52053202-035

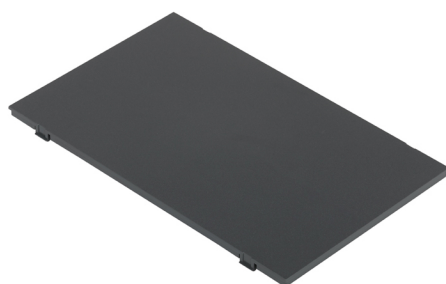

BASIC INFORMATION

DESCRIPTION

This complete kit for floor box for shallow floor box belongs to the Simon 500 Cima range. The kit is designed to be flush mounted into raised or concrete floor. For this last you will need to be combined with a plastic with reference G 201. The kit is designed for 4 elements and is made up of a double socket and 2 plates 1RJ45 ® and is presented in a beautiful grey colour it is ideal for any room in which it is placed. The product has dimensions of 252 x 180 millimetres and x 69 millimetres of depth and consists of 4 modules. The manufacturing materials of the kit are of high quality, which gives it a resistance and hardness extra that will extend the service life of the product, it is metal components with self-extinguishing and halogen-free thermoplastic insulation., which means in case of fire it does not contribute to flame spread, lending safety to the final set.

FINISH

Grey

PACKAGING CONTENTS

Trim cover

MATERIAL

Plastic

ETIM CLASS

EC002417

REMARKS

Optional element. To combine with the floor box if not installing the same floor finish.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

IK CLASSIFICATION

08

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

AVAILABLE IN

4, 6 and 8 elements

INSULATION RESISTANCE (V-MΩ)

>5 MOhms at 500V

NUMBER OF MODULES

4 modules

DIELECTRIC STRENGTH

No holes or contours, with 2000V at 50 Hz for 1 minute

IP RATING

IP4X

RAL

7011

MAX TEMP DURING CONSTRUCTION WORK (°C)

+90 °C

KIT AVAILABILITY

No

VERSION

4 elements

HEAT RESISTANCE (°C)

+125°C (according rule IEC 60695-10-2)

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

INSTALLATION AND MAINTENANCE

REMOVAL OF COVER

Only with tool

TYPE OF FASTENING

Using the screws supplied

INSTALLATION TYPE

In raised or concrete floor with shallow floor boxes

EXTINGUISHING (°C)

+850 °C / 30 seconds (GWFI in accordance with standard IEC 60695-2-11)

INSTALLATION DIRECTION

Horizontal, Vertical

REGULATIONS

REGULATIONS

Directive 2014/35/UE LVD + EN 60670-23:2008

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053101704

PRODUCT NET WEIGHT

0.09

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

136500

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053101704

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

5

PACKAGING NET WEIGHT

0.09

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

130

PACKAGING WEIGHT UNIT

KGM

UNITARY PACKAGING GROSS WEIGHT

0.09

PACKAGING LENGTH

210