


## Bus coupling unit with LON system

REF. 8000100-039

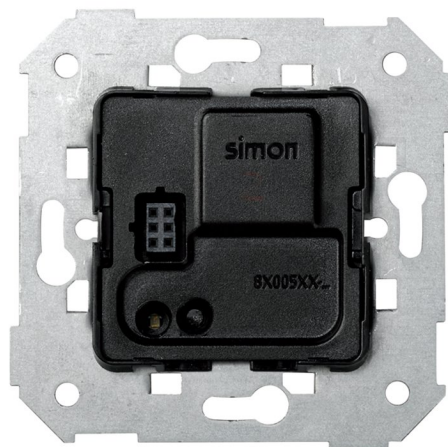

### BASIC INFORMATION

#### PACKAGING CONTENTS

Coupling unit and instructions

#### ETIM CLASS

EC000634

## TECHNICAL INFORMATION

### AVAILABLE MARKET

CE

### INDICATOR FUNCTION

No

### POWER SUPPLY (V~)

24 Vdc

### CABLE SECTION ADMITTED (MM)

From 0,5 to 2,5 mm

### IP RATING

IP20

### NUMBER OF POSSIBLE ELEMENTS

1 element

### OPERATING TEMPERATURE RANGE (°C)

0 - 45 °C

## INSTALLATION AND MAINTENANCE

### BUS CONNECTION TYPE OF TERMINAL CONNECTION

Por inserción

### CLAW

Optional

### INSTALLATION TYPE

Suitable for surface and flush mounting

### CABLE STRIPPING NECESSARY (MM)

8

### INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

### TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

## REGULATIONS

### REGULATIONS

EN 50428; EN 60669; EN 50491-1; EN 50491-2

## LOGISTICS INFORMATION

UNITARY EAN CODE

8421053125571

UNITARY PACKAGING WEIGHT  
UNIT

KGM

PACKAGING MEASUREMENT  
UNIT

MMT

UNITARY PACKAGING HEIGHT

0

PACKAGING EAN

8421053125571

PACKAGING VOLUME

0.329

UNITARY PACKAGING WIDTH

0

UNITS CONTAINED PACKAGING

1

PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING LENGTH

0

PACKAGING HEIGHT

57

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING VOLUME

0

PACKAGING WIDTH

76

PACKAGING NET WEIGHT

0.1

UNITARY PACKAGING GROSS  
WEIGHT

0.1

PACKAGING LENGTH

76

PACKAGING WEIGHT UNIT

KGM

PRODUCT NET WEIGHT

0.1