
Two-pole switch 16AX 250V~ with indicator light function and Faston/welding terminal connection system with plate white Simon K45

REF. **KL04/9**

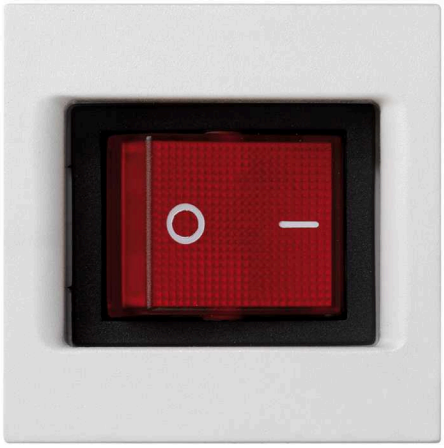

BASIC INFORMATION

DESCRIPTION

Double-pole switch with indicator light function and faston / welding clamping system with plate, in white colour and of the series Simon K45. It has a current of 16 AX and a voltage of 250V, in addition to presenting a operation of tilting type. This switch can be position, place in both of surface-mounted and flush mounted, in places with a temperature which is located between 5 and 40ºC, approximately, although it can withstand, perfectly, extreme temperatures of -25 to 50ºC. In addition, it includes the trim plate and I / O engraving and supports a section of wire up to 1.5 mm, with a stripping of 11 mm Complies with the standards EN 60669-1: 1999 + A1: 2002 + A2: 2008 + EN 50581: 2012 and is manufactured with metal components with halogen-free insulation and thermoplastic trim, which is a material very simple cleaning since it will only need to use a soft and dry cloth, without resorting to never use cloths or abrasive cleaners that contain chlorine in its formula.

FINISH

White

COMPATIBILITY

Simon K45 enclosures for installation in the wall, floor, ceiling and furniture and Simon 500 Cima enclosures (need to be combined with the K45 to 500 Cima adaptor ref.50012088-030)

PACKAGING CONTENTS

Mechanism with plate, black and blue cabling, faston and instructions

ETIM CLASS

EC001590

REMARKS

The article includes the trim plate.

TECHNICAL INFORMATION

AVAILABLE MARKET
CE

CABLE SECTION ADMITTED (MM)
Up to 1,5 mm

CONSUMPTION INDICATOR (MA)
0.5 W/h

NUMBER OF POSSIBLE ELEMENTS
1 element

INDICATOR FUNCTION
Yes

CURRENT (A)
16 AX

IP RATING
IP20

MAINTENANCE
Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM
Tilting

NOMINAL VOLTAGE (V~)
250 V~

OPERATING TEMPERATURE RANGE (°C)
5 - 40 °C

RAL
9003

STORAGE TEMPERATURE RANGE (°C)
-25 - 50 °C

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)
11

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX
Universal, specific Simon K45 and specific Simon 500 Cima using adaptor (ref.50012088-030)

INSTALLATION DIRECTION
Vertical according to the direction of the mechanisms

INSTALLATION TYPE
Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1
Faston - Solder

REGULATIONS

REGULATIONS
EN 60669-1:1999+A1:2002+A2:2008 + EN 50581:2012

simon

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT
0

UNITARY PACKAGING WIDTH
0

UNITARY PACKAGING LENGTH
0

UNITARY PACKAGING VOLUME
1472064

UNITARY PACKAGING VOLUME UNIT
MMQ

UNITARY PACKAGING GROSS WEIGHT
0.037

PRODUCT NET WEIGHT
0.037

UNITARY PACKAGING WEIGHT UNIT
KGM

PACKAGING EAN
8426436034525

UNITS CONTAINED PACKAGING
10

PACKAGING HEIGHT
88

PACKAGING WIDTH
123

PACKAGING LENGTH
136

PACKAGING MEASUREMENT UNIT
MMT

PACKAGING VOLUME
1472064

PACKAGING VOLUME UNIT
MMQ

PACKAGING GROSS WEIGHT
0.37

PACKAGING NET WEIGHT
0.37

PACKAGING WEIGHT UNIT
KGM