


Flat voice and data plate without dust cover for 1 element with 2 RJ45 category 6A FTP white Simon 500 Cima

REF. 50001189-030

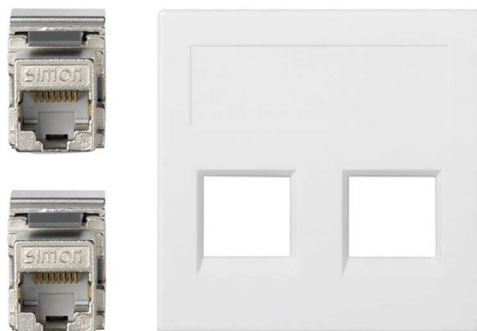

BASIC INFORMATION

DESCRIPTION

Simon 500 Cima is without doubt, the best solution for any type of connection in any ambience. Thanks to its various mechanisms and kits as assembled and wired, make this series the fastest, simple and complete in terms of installation and security. Among them we find this plate for voice and data connections. With a white finish in colour, flat form and without dust shutter, this plate has an element, 2 RJ45 connectors, also includes snap-fit for installation in enclosures to any address, a module adaptable and RJ45 connectors. The mechanisms of the Simon 500 Cima series have also with linkable centre frame, installable without tools, protecting and separating the electrical cabling the voice, data or multimedia and by eliminating possible transmission errors. For this and much more, Simon is symbol of quality and security.

FINISH

White

PACKAGING CONTENTS

Flat voice and data plate without dust cover, 2 category 6A FTP RJ45 and installation manual

ETIM CLASS

EC000018

COMPATIBILITY

Simon 500 Cima enclosures

REMARKS

The plate is snap-fitted for mounting in vertical and horizontal enclosures without the need for an adaptor.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

DUST PROTECTION

No

NUMBER OF MODULES

1

CABLE SECTION ADMITTED (MM)

22-24 AWG wiring

DUST SHUTTER

No

PLATE TYPE

Flat

RJ45 CONNECTION

Without insertion tool

FORMAT

RJ45

RAL

9003

CONNECTOR CHARACTERISTICS

category 6A FTP

IP RATING

IP20

RJ45 ADAPTOR MODULE

Included in voice and data plate

NUMBER OF CONNECTORS

2

KIT AVAILABILITY

No

SNAP-FIT RJ45 PLATES

Keystone I, II, ATT®/Avaya®

RJ45 CONNECTORS

Included in voice and data plate

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

SNAP-FIT TYPE

Keystone I, II, ATT®/Avaya®

MAX TEMP DURING CONSTRUCTION WORK (°C)

+60 °C

TEMPERATURE RANGE DURING INSTALLATION (°C)

-5 to 60 °C

VERSION

Single

INSTALLATION AND MAINTENANCE

REMOVAL OF CONNECTOR

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Specific Simon 500 Cima

INSTALLATION DIRECTION

Vertical, corresponding with the direction of the mechanisms

INSTALLATION TYPE

Fixing by direct snap-fit, no tools needed.

REMOVAL OF THE PLATE

Only with tool

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + post. mod. | EN IEC 63000:2018 | EN 50173-1:2018*1

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053098073

PACKAGING VOLUME

0.052

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

20

PACKAGING VOLUME UNIT

HLT

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

80

PACKAGING GROSS WEIGHT

0

UNITARY PACKAGING GROSS WEIGHT

0.069

PACKAGING WIDTH

224

PACKAGING NET WEIGHT

1.38

PRODUCT NET WEIGHT

0.069

PACKAGING LENGTH

290

PACKAGING WEIGHT UNIT

KGM

