

2-way switch 10AX 250V~ with fast terminal connection system ivory Simon 31

REF. 31201-31



BASIC INFORMATION

DESCRIPTION

With the 2-way switch in ivory of the collection Simon 31, you will obtain an elegant finishes in perfect consonance with the maximum innovation and functionality. With quick terminal connection system, this 2-way switch with rocker operation, it is compatible with power supplies with a voltage of 250 Volt and a maximum current of 10 AX. Also, and in a reduced space a dimension of 64 x 65 mm, supports a wire cross-section of 1.5 to 2.5 mm and stripping of 11 mm. It is made of metal materials with halogen-free thermoplastic isolated and thermoset trim, to guarantee the security of your room in a possible fire. The connection of thermoplastic and the thermoset trim, prevent the propagation of the flame and smoke poison. Thanks to its quick terminal connection and its dimensions lamps, guaranteeing the integration of the set in all types of spaces, thanks to its design of simple lines. For a perfect finishes, Simon 31 recommended to use the same tone for frames and rockers.

FINISH

Ivory

PACKAGING CONTENTS

Mechanism with rocker

COMPATIBILITY

Simon 31 frames

ETIM CLASS

EC001590

REMARKS

Available in 5 finishes. It is recommended to choose a frame the same colour as the selected rocker.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 AX

NOMINAL VOLTAGE (V~)

250 V~

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP21

OPERATING TEMPERATURE

RANGE (°C)

5 - 40 °C

NUMBER OF POSSIBLE ELEMENTS

1 element

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

INDICATOR FUNCTION

No

TYPE OF MECHANISM

Pivoting

VERSION

Single

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

INSTALLATION TYPE

Suitable for surface and flush mounting

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

UNE-EN 60669-1:2002 + A1:2003 + A2:2009

LOGISTICS INFORMATION

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

PACKAGING EAN

8421053006696

PACKAGING VOLUME

3026595

UNITARY PACKAGING LENGTH

0

UNITS CONTAINED PACKAGING

10

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

83

PACKAGING GROSS WEIGHT

0.81

UNITARY PACKAGING GROSS WEIGHT

0.081

PACKAGING WIDTH

165

PACKAGING NET WEIGHT

0.81

PRODUCT NET WEIGHT

0.081

PACKAGING LENGTH


221

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 31, 75, 77, 82 Y 88


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XXXX101-XXX

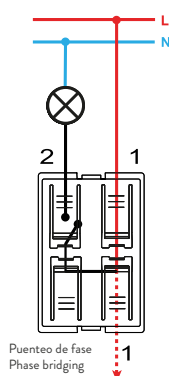


Interrupor unipolar / Single-pole switch
7700101-039




Pulsador / Push button switch
XXXX150-XXX




Pulsador / Push button switch
7700150-039

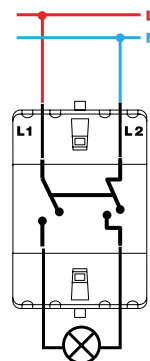


Interrupor bipolar / Double pole switch
XXXX133-XXX

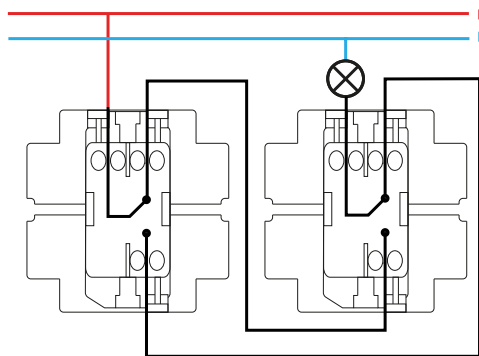


Conmutador / 2-way switch
XXXX201-XXX

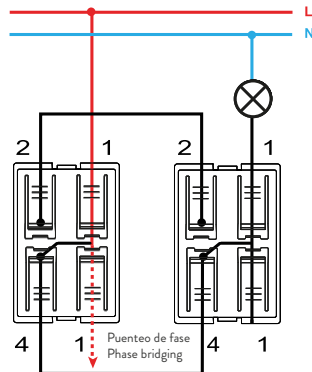


Conmutador / 2-way switch
7700201-039

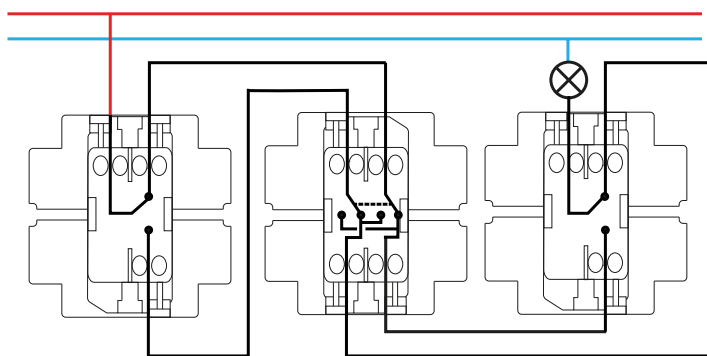


Conmutador cruce / Intermediate switch
XXXX251-XXX

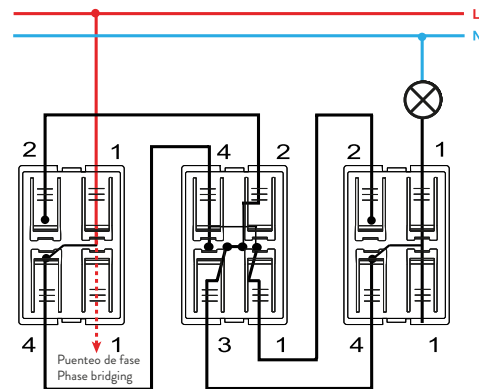


Conmutador cruce / Intermediate switch
7700251-039

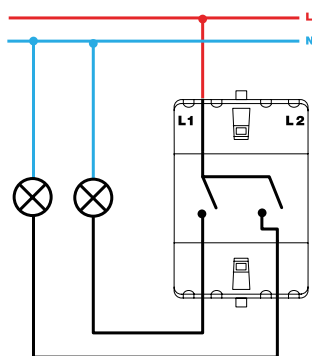


Grupo 2 interruptores / 2 switches group
XXXX398-XXX

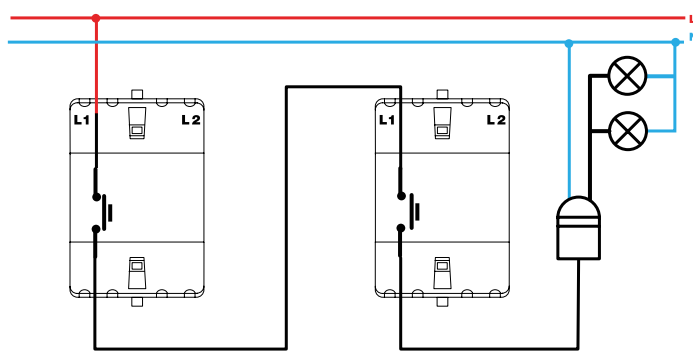


Pulsador desconexión / Push button disconnection switch
XXXX152-XXX

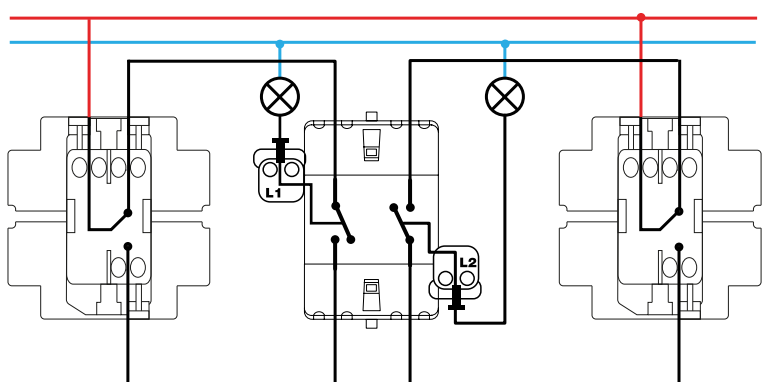


Grupo dos conmutadores / 2-way switches group
XXXX397-XXX

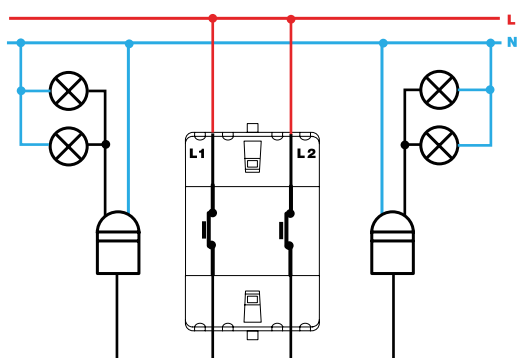


Grupo de pulsadores desconexión / Push button switch
disconnection group XXXX395-XXX

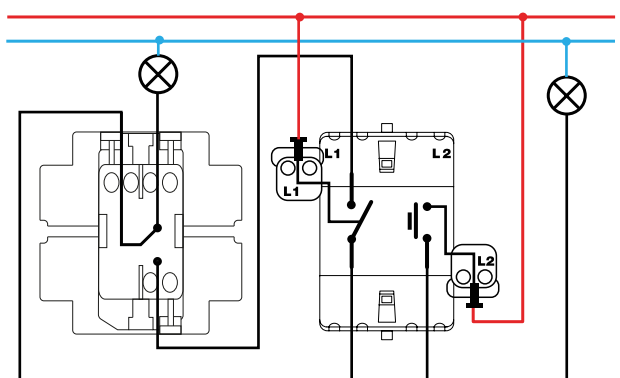


Grupo conmutador y pulsador / 2-way and push button switch group
XXXX301-XXX




Interrupor unipolar / Single-pole switch
XXXX102-XXX

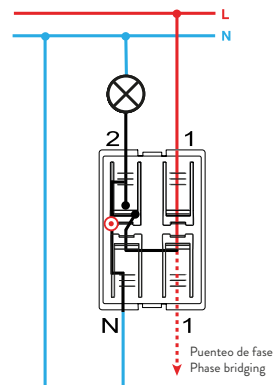


Interrupor con piloto / Push button pilot switch
7700112-039

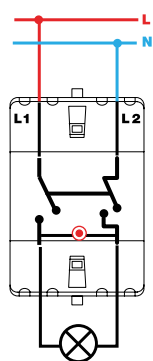


Interrupor bipolar / Double pole switch
XXXX134-XXX

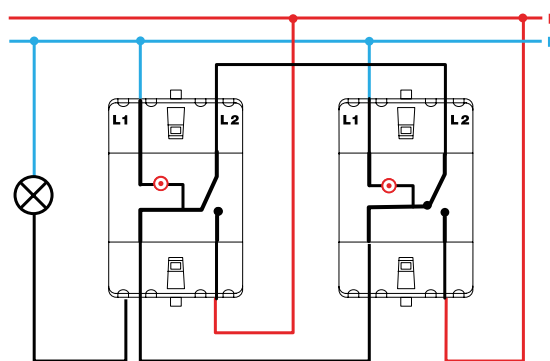


Conmutador / 2-way switch
XXXX202-XXX




Interrupor unipolar con luminoso / Single-pole switch with light
XXXX104-XXX




Pulsador con luminoso / Push button switch with light
XXXX160-XXX

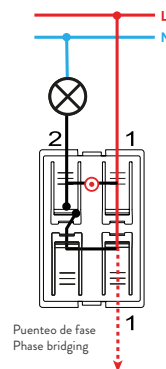

Pulsador con luminoso / Push button switch with light
7700160-039

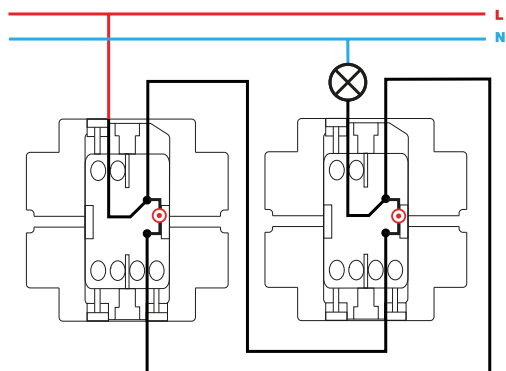

Conmutador con luminoso / 2-way switch with light
XXXX204-XXX

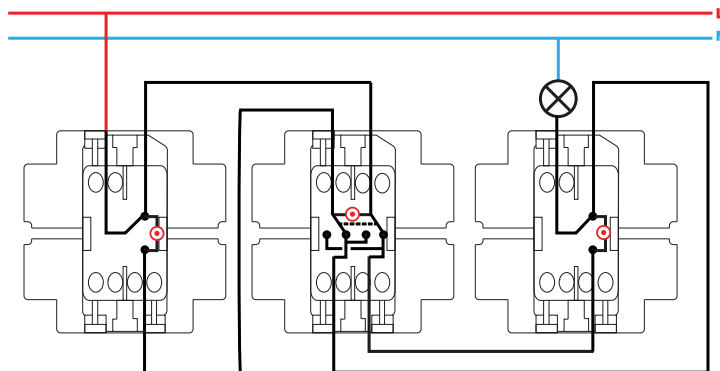

Conmutador cruce con luminoso / Intermediate switch with light
XXXX254-XXX