


Wall movement and brightness detector 120° 10m black IP54 3Y

REF. 89101143-438

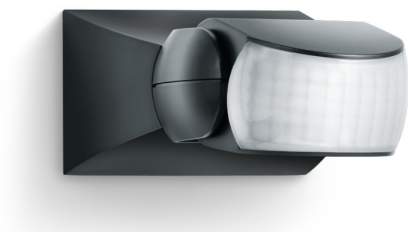

BASIC INFORMATION

DESCRIPTION

Wall-mounted PIR motion and light detector. The recommended installation height is 2 m, with a maximum height of 3 m. It has a detection angle of 120° and an opening angle of 40°. The tangential detection range is 10 m and the radial detection range is 3 m.

The luminosity regulation range is 2 - 2000 lux and the timing range is 8 s - 35 min. The detector configuration is done through potentiometers.

The control output is On/Off and the maximum switchable power is 500 W (64 W LED).

The power supply voltage is 220 - 240 VAC. The operating temperature of the detector is: -20 - 50 °C.

Black finish, IP 54 protection rating, and dimensions: 80 x 50 x 120 mm.

3-year warranty.

For more product information, visit STEINEL website by clicking [here](#)

FINISH

Black

COMPATIBLE WITH MECHANICAL PUSH BUTTON

No

ETIM CLASS

EC000133

TECHNICAL INFORMATION

FREQUENCY

50 - 60 Hz

MAXIMUM POWER (W)

500

RAL

9005

IP RATING

IP54

POWER SUPPLY (V~)

220/240 V~

CONTROL

On/Off

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053341506

UNITARY PACKAGING GROSS WEIGHT

0.207

PACKAGING LENGTH

120

UNITARY PACKAGING HEIGHT

0

PRODUCT NET WEIGHT

0.14

PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING VOLUME

842400

UNITARY PACKAGING LENGTH

0

PACKAGING EAN

8421053341506

PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITS CONTAINED PACKAGING

1

PACKAGING GROSS WEIGHT

0.207

UNITARY PACKAGING VOLUME

0

PACKAGING HEIGHT

78

PACKAGING NET WEIGHT

0.14

UNITARY PACKAGING VOLUME UNIT

MMQ

PACKAGING WIDTH

90

PACKAGING WEIGHT UNIT

KGM