

**Push-button switch with light symbol 10A 250V~, built-in
light indicator and fast terminal connection system ivory
Simon 27 Play**

REF. 27161-62



BASIC INFORMATION

DESCRIPTION

To get the maximum functionality in its electrical mechanisms, Simon 27 Play offers the tilting push-button switch with signalling function integrated. With finishes in a discreet and stylish ivory colour, the Simon 27 Play collection combines design, functionality and innovation in this push-button switch with engraved light and quick terminal connection system. Compatible with power supplies of 250 Volt and 10 Amps, has a 0.55 mA only in the system signing. Consists of 2 modules for one element, with a size of 45 x 45 mm and a cable section cross-section of 1.5 to 2.5 mm and stripping of 11 mm Made of metal materials with halogen-free thermoplastic isolated and thermo-stable trim, it protects the room of the flame spread and smoke poison in case of fire. Designed for installation both recessed and surface-mounted, increasing the versatility of the set to adapt to the needs of each room aesthetic and functional.

FINISH

Ivory

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

Mechanism with rocker

MATERIAL

Thermoplastic

ETIM CLASS

EC000029

REMARKS

Can be combined with article 2700802-064 if replacing the light indicator.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CURRENT (A)

10 A

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

CABLE SECTION ADMITTED (MM)

From 1,5 to 2,5 mm

IP RATING

IP20

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

CONSUMPTION INDICATOR (mA)

0.55 mA

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

NUMBER OF POSSIBLE ELEMENTS

1 element

VERSION

Single

INDICATOR FUNCTION

Yes

TYPE OF MECHANISM

Pivoting

VOLTAGE (V~)

250 V~

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

11

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and
Centralisations

INSTALLATION DIRECTION

Horizontal, Vertical

INSTALLATION TYPE

Suitable for surface and flush
mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Fast

REGULATIONS

REGULATIONS

Dir. 2014/35/UE LVD | Dir. 2011/65/UE RoHS + post. mod. | EN 60669-1:2018 | EN IEC 63000:2018

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053251713

UNITARY PACKAGING HEIGHT

0

UNITARY PACKAGING WIDTH

0

UNITARY PACKAGING LENGTH

0

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0

UNITARY PACKAGING VOLUME UNIT

MMQ

UNITARY PACKAGING GROSS WEIGHT

0.032

PRODUCT NET WEIGHT

0.032

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053035870

UNITS CONTAINED PACKAGING

10

PACKAGING HEIGHT

53

PACKAGING WIDTH

105

PACKAGING LENGTH

221

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

1229865

PACKAGING VOLUME UNIT

MMQ

PACKAGING GROSS WEIGHT

0.32

PACKAGING NET WEIGHT


0.32

PACKAGING WEIGHT UNIT


KGM

MECANISMOS SIMON 27, 28 Y 44


Mecanismos básicos / Basic switches




Interrupor unipolar / Single-pole switch
XX00101-XX




Pulsador / Push button switch
XX00150-XX



Interrupor bipolar / Double pole switch
XX00133-XX




Conmutador / 2-way switch
XX00201-XX

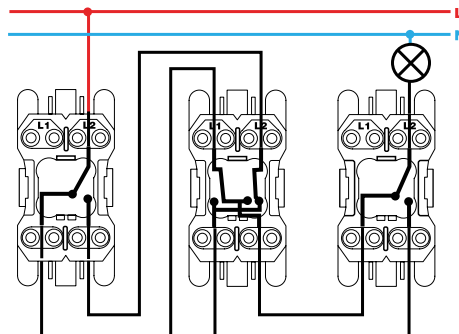


Conmutador cruce / Intermediate switch
XX00251-XX


Mecanismos con piloto / Pilot switches




Interrupor unipolar / Single-pole switch
XX00102-XX




Interrupor bipolar / Double pole switch
XX00134-XX

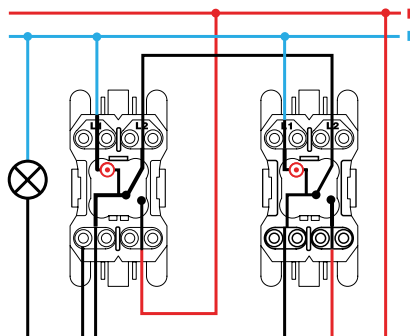


Conmutador / 2-way switch
XX00202-XX




Interrupor unipolar / Single-pole switch
XX00104-XX



Pulsador / Push button switch
XX00160-XX



Conmutador / 2-way switch
XX2700204-XX

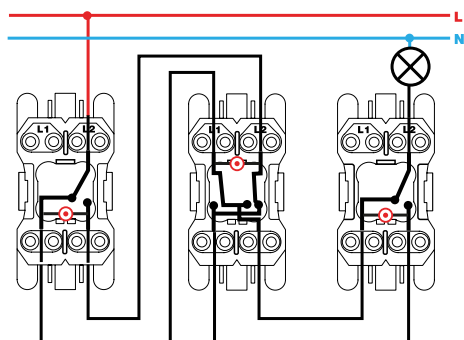

Conmutador cruce / Intermediate switch
XX2700254-XX