

VGA HD15 connector female with screw terminal connection system and built-in plate white Simon 27 Play

REF. 2700091-030



BASIC INFORMATION

DESCRIPTION

This VGA HD15 female with screw terminal connection system and built-in plate, it is part of the Simon 27 Play series products. The connector is made up of two modules and has dimensions of 45 x 45 millimetres. Stands out for its easy installation, which offers two possibilities, carried out by means of recessed or surface-mounted directly on. It supports a wire section from 0.2 to 0.5 millimetres and it is advisable to a maximum length of cabling 20 meters. The connector is white in colour, so it is very simple integration in any room of the home, office or place where it is placed, regardless of its aesthetic features. The connector is made of metal components with halogen-free insulation and the trim is made of thermoplastic. The good quality of these materials make the product to work optimally even low temperatures ranging from -25 to 50 degrees centigrade.

FINISH

White

COMPATIBILITY

Simon 27 Play, Simon 27 Neos, Simon 27 Scudo, Simon 27, Simon 27 Centralisations and Simon 44 Aqua frames

PACKAGING CONTENTS

VGA HD15 female connector and instruction sheet

ETIM CLASS

EC000018

REMARKS

Recommended maximum cable length: 20 metres. For more information see the product instruction sheet.

TECHNICAL INFORMATION

AVAILABLE MARKET

CE

CABLE SECTION ADMITTED (MM)

From 0,2 to 0,5 mm

NUMBER OF CONNECTORS

1

CONNECTOR TYPE

VGA

NUMBER OF CONTACTS

15

NUMBER OF POSSIBLE ELEMENTS

1 element

FORMAT

VGA

IP RATING

IP20

MAINTENANCE

Clean with a soft, dry cloth. Do not use abrasive cloths or cleaning products that contain chlorine.

TYPE OF MECHANISM

Insertion

OPERATING TEMPERATURE RANGE (°C)

5 - 40 °C

STORAGE TEMPERATURE RANGE (°C)

-25 - 50 °C

TYPE

HD15

VERSION

Single

NUMBER OF WIRES

10

INSTALLATION AND MAINTENANCE

CABLE STRIPPING NECESSARY (MM)

5

CLAW

Simon 27

INSTALLABLE IN FLUSH MOUNT JUNCTION BOX

Universal, American and Centralisations

INSTALLATION TYPE

Suitable for surface and flush mounting

TYPE OF TERMINAL CONNECTION - FUNCTION 1

Screw

REGULATIONS

REGULATIONS

Directive 2011/65/UE RoHS + EN 50581:2012

LOGISTICS INFORMATION

UNITARY EAN CODE

8421053090596

UNITARY PACKAGING HEIGHT

25

UNITARY PACKAGING WIDTH

72.2

UNITARY PACKAGING LENGTH

72.2

UNITARY PACKAGING MEASUREMENT UNIT

MMT

UNITARY PACKAGING VOLUME

0.13

UNITARY PACKAGING VOLUME UNIT

DMQ

UNITARY PACKAGING GROSS WEIGHT

0.068

PRODUCT NET WEIGHT

0.05

UNITARY PACKAGING WEIGHT UNIT

KGM

PACKAGING EAN

8421053090596

UNITS CONTAINED PACKAGING

1

PACKAGING HEIGHT

57

PACKAGING WIDTH

76

PACKAGING LENGTH

76

PACKAGING MEASUREMENT UNIT

MMT

PACKAGING VOLUME

0.105

PACKAGING VOLUME UNIT

DMQ

PACKAGING GROSS WEIGHT

0.068

PACKAGING NET WEIGHT

0.05

PACKAGING WEIGHT UNIT

KGM

VISTA FRONTAL E ISOMÉTRICA DEL PRODUCTO


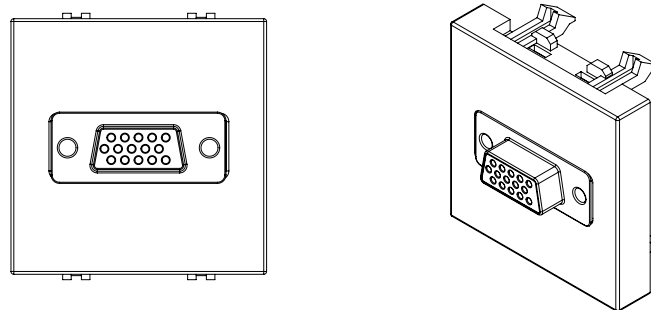


DIAGRAMA DE MONTAJE

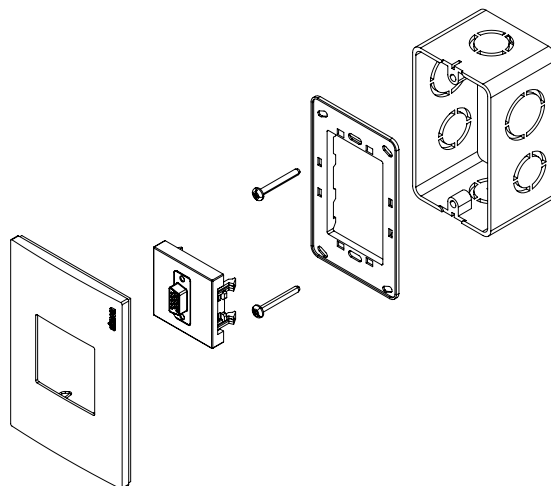

*Placa y chasis NO incluidos